


REVISIONS					
REV.	DESCRIPTION	DATE	ECN		
Α	INITIAL RELEASE	2/27/17	2555		
В	HEAT TREAT WAS 480 - 540 HV	3/29/17	2615		
С	MATERIAL UPDATE	7/12/2018	3056		

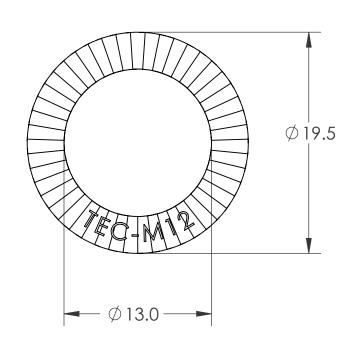

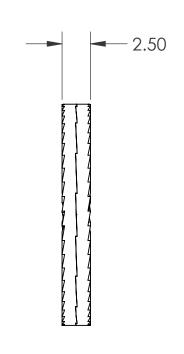



UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ±1	DRAWN	MTB	2/27/17
I.D. TOLERANCE: ±0.2 O.D. TOLERANCE: ±.0.2 THICKNESS TOLERANCE: ±0.25	CHECKED		
INTERPRET GEOMETRIC	ENG APPR.	JVK	2/27/17
TOLERANCING PER: ASME Y14.5M-1994	MFG APPR.		
MATERIAL	Q.A.		
SCM435 OR 4130 STEEL,	COMMENTS:		
HT: THROUGH HARDEN 465 HV MIN	E-mail: info@disc-lock.com		
FINISH DELTA PROTEKT BASE COAT (KL100) & TOP COAT (VH302GZ)	www.disc-lock.com Phone: 866-474-3739 Fax: 716-875-0358		

DESCRIPTION:

TEC WASHER GLUED PAIR 12MM

SIZE PART NO.:

2

TEC-M12

REV С

SCALE: 2:1 WEIGHT:

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.

SHEREX FASTENING SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

TEC-M12

DO NOT SCALE DRAWING

3