Unified Thread (Unit – Inches)

Part Number (steel)	Thread Size	Grip Range Min.	Grip Range Max.	L ±.015	HD ±.025	HT ±.003	D Max.	IL Max.	HOLE SIZE +.004/–.000
CAH2–3716–150	3/8–16 UNC	.027	.150	.685	.655	.035	.499	.530	.500

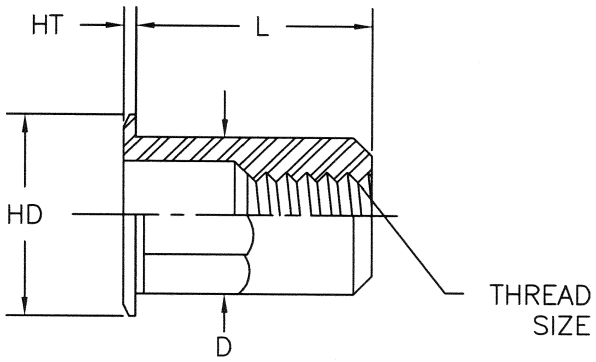



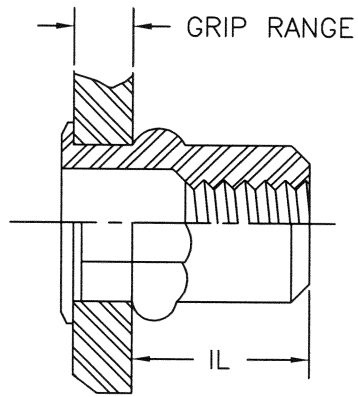

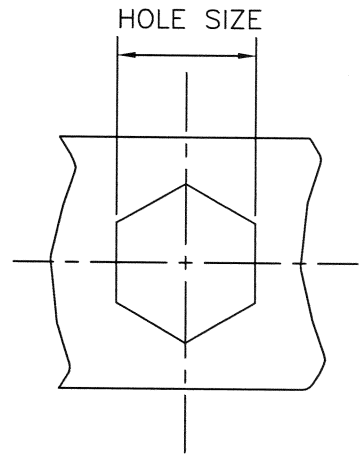

CAH Specifications

Material: Steel 1008/1010
Stainless Steel 302
Aluminum 5056

Finish: Zinc Plated–Yellow Dichromate per ASTM B633 Fe/Zn 8, Type II

Part Number Description

CAH2–3716–150

CAH	2	3716	150	(–)
Product Style Semi Hex Thin Wall Series	Material 1–Stainless Steel 2–Steel 3–Aluminum	Thread Size	Grip Range	Empty–Open End B–Closed End

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

REV	DESCRIPTION	ECN	DATE

SHEREX FASTENING SOLUTIONS
1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA

DRAWN BY:	DATE:	SCALE:	TITLE:
TOO	4/29/05	1:1	HALF HEX LARGE FLANGE

CHECK'D BY:	DATE:
TOO	4/29/05

APPR'D BY:	DATE:
AJP	4/29/05

E–mail: info@sherex.com
www.sherex.com
Phone: 866–474–3739
Fax: 716–681–0270

SHEREX FASTENING SOLUTIONS

DRAWING NO.

CAH2–3716–150