
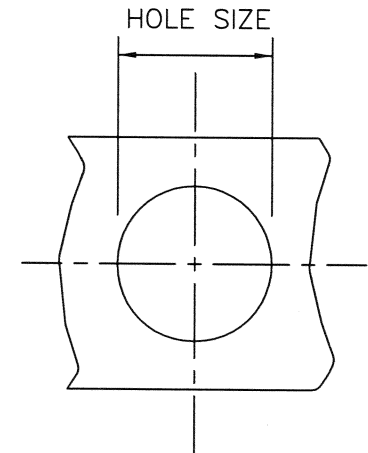
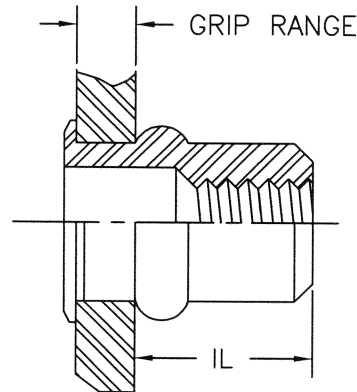


Unified Thread (Unit - Inches)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L ±.015	HD ±.010	HT ±.003	D Max.	IL Max.	HOLE SIZE +.006/- .000
CA02-2520-165	1/4-20 UNC	.030 .165	.580	.425	.022	.374	.440	.375

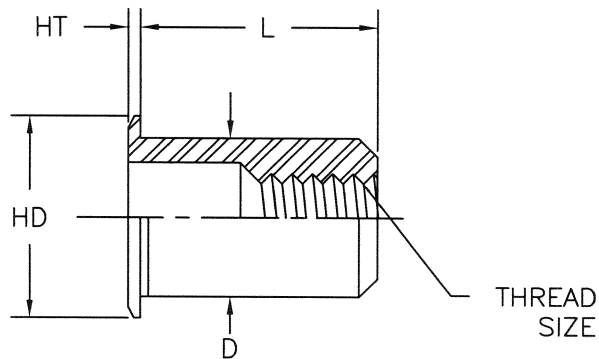

CAO Specifications
Material: Steel 1008/1010

Finish: Zinc Plated
per ASTM B633 Fe/Zn 8, Type III

Part Number Description

CA02-2520-165

CAO
Product Style
Low Profile
Smooth Shank
Thin Wall Series

2
Material
2-Steel

2520
Thread Size

165
Grip Range

(-)
Empty-Open End
B-Closed End

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



DRAWN BY: JLA	DATE: 8/11/03	SCALE: 1:1	TITLE: CAO RIVET NUT, OPEN END
------------------	------------------	---------------	-----------------------------------

CHECK'D BY:	DATE:	E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-681-0270
APPR'D BY: AJP	DATE:	

DRAWING NO.

CA02-2520-165

REV	DESCRIPTION	ECN	DATE