


Unified Thread (Unit – Inches)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L ±.015	HD ±.010	HT ±.003	D Max.	IL Max.	HOLE SIZE +.006/–.000
CAO2–3118–200	5/16–18 UNC	.040 .200	.690	.560	.022	.499	.540	.500

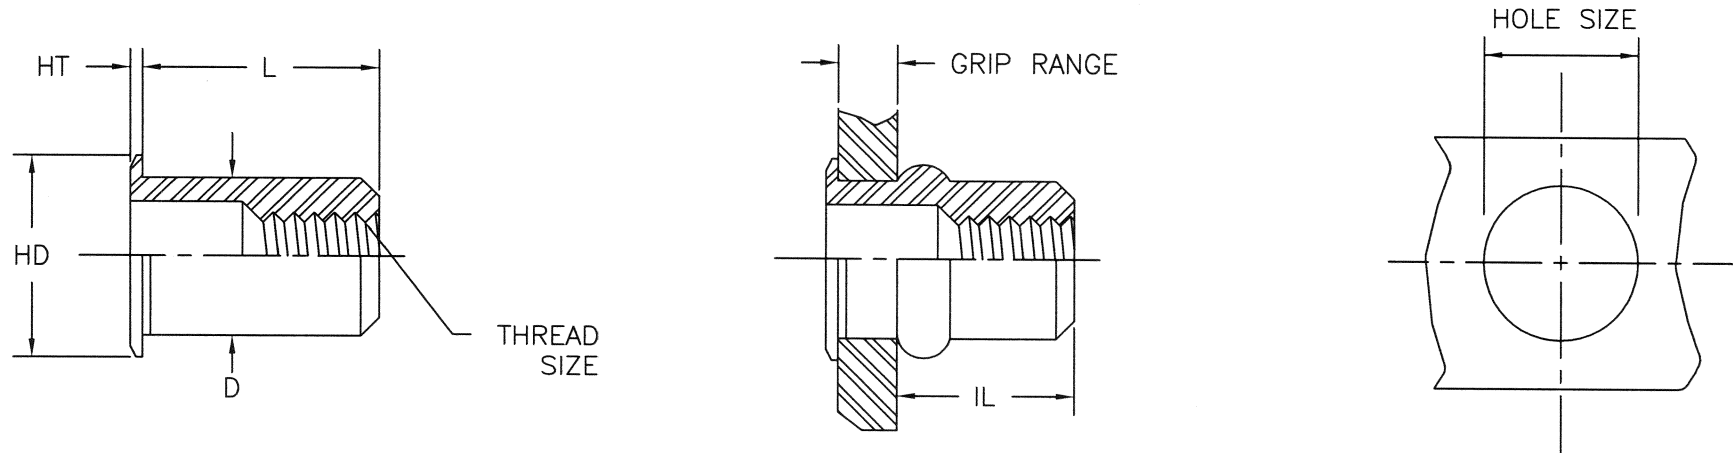

CAO Specifications
Material: Steel 1008/1010

Part Number Description

CAO2–3118–200

Finish: Zinc Plated
per ASTM B633 Fe/Zn 8, Type III

CAO
Product Style
Low Profile
Smooth Shank
Thin Wall Series

2
Material
2–Steel

3118
Thread Size

200
Grip Range

(–)
Empty–Open End
B–Closed End

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



SHEREX FASTENING SOLUTIONS

DRAWN BY:

JLA

DATE:

8/11/03

SCALE:

1:1

TITLE:

CAO RIVET NUT, OPEN END

CHECK'D BY:

DATE:

E–mail: info@sherex.com
www.sherex.com

DRAWING NO.

APPR'D BY:

DATE:

Phone: 866–474–3739
Fax: 716–681–0270

CAO2–3118–200

REV	DESCRIPTION	ECN	DATE
-----	-------------	-----	------