
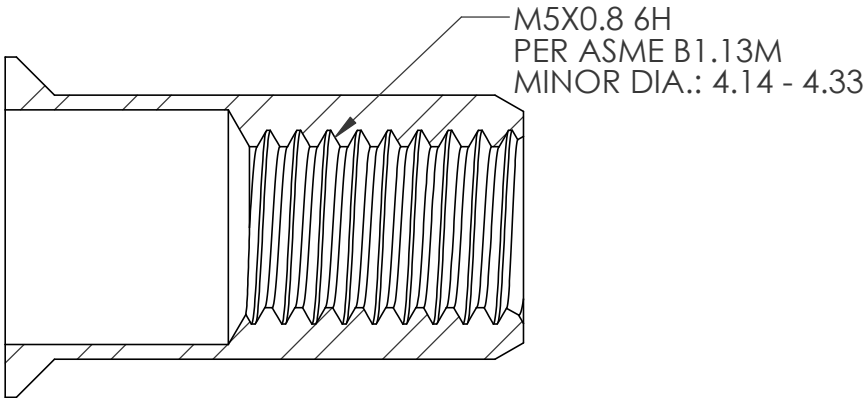
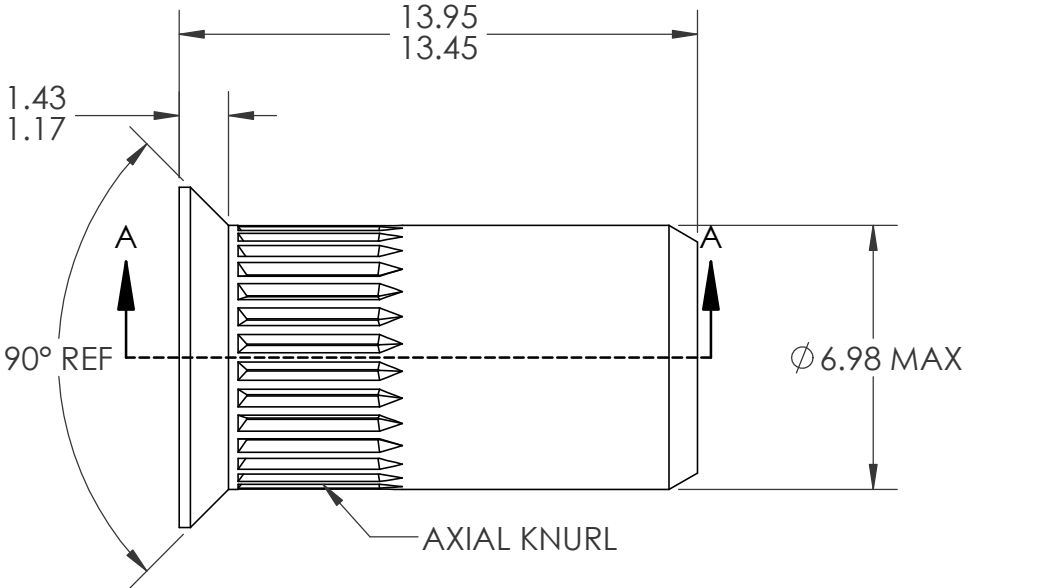


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	06/02/26	4759	JH
B	UPDATED NOTE 6 & HT	21/05/26	4812	JH
C	UPDATED C-SUNK ANGLE	11/06/26	4821	JH

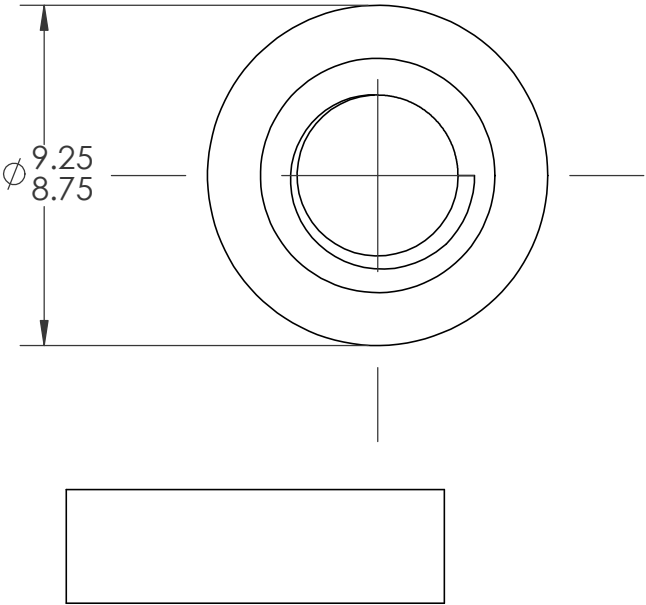

SECTION A-A

- NOTE:
- GRIP RANGE: 1.5-4.0
 - HOLE SIZE: 7.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 8.0 REF
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN PULL
 - COUNTERSUNK HOLE DEPTH: 1.2 MAX

PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE. UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JH	30/1/26	
				CHECKED			
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JK	12/6/26	
			MATERIAL	MFG APPR.			
			1010 STEEL	Q.A.			
			COMMENTS:			TITLE: COUNTERSUNK HEAD KNURLED	
			E-mail: info@sherex.com				
			www.sherex.com				
			Phone: 866-474-3739				
</							