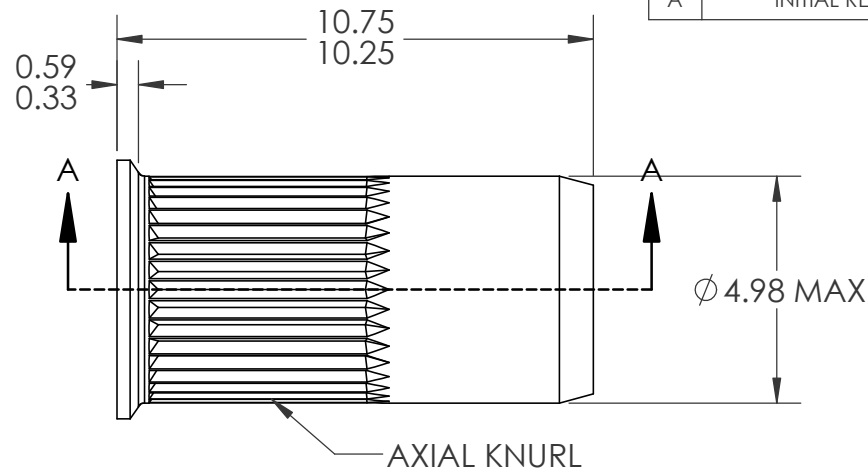
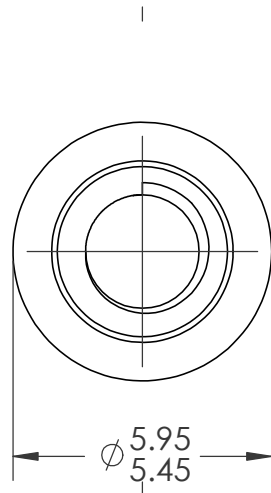


M3X0.5 6H
PER ASME B1.13M
MINOR DIA.: 2.46 - 2.60

SECTION A-A

NOTE:

- GRIP RANGE: 2.0-3.5
- HOLE SIZE: 5 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 6.0 REF
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JH	1/13/26			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED					
		MATERIAL 1010 STEEL	ENG APPR.			TITLE: SMALL FLANGE KNURLED BODY		
			MFG APPR.					
			Q.A.					
		FINISH ZINC WITH CLEAR TRIVELANT CHROMATE PER SFS-01-001, SC4	COMMENTS:			SIZE	DWG. NO.	REV
			E-mail: info@sherex.com					
			www.sherex.com					
NEXT ASSY	USED ON		Phone: 866-474-3739			A	CKKM2-350-3.5	A
			Fax: 716-875-0358					
APPLICATION		DO NOT SCALE DRAWING	SCALE: 2:1					