
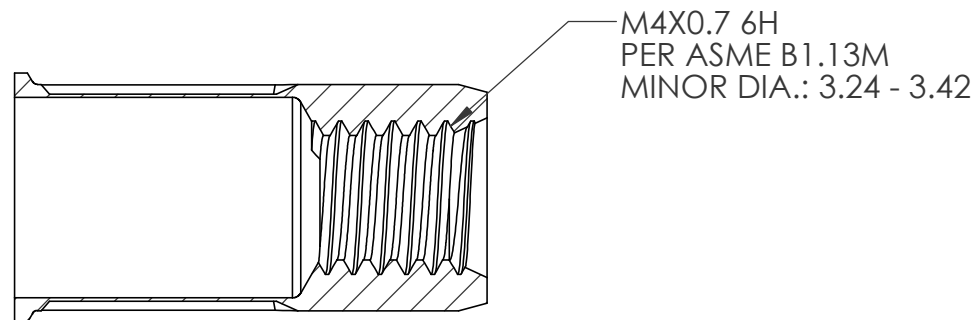
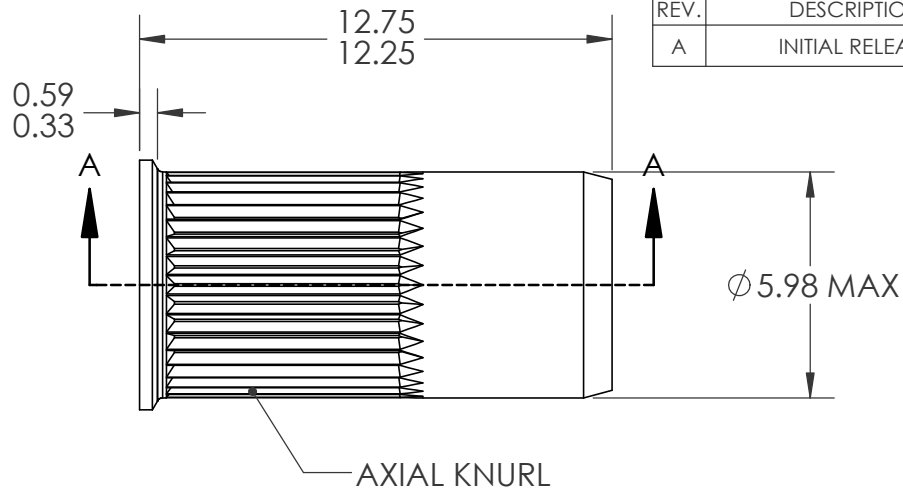


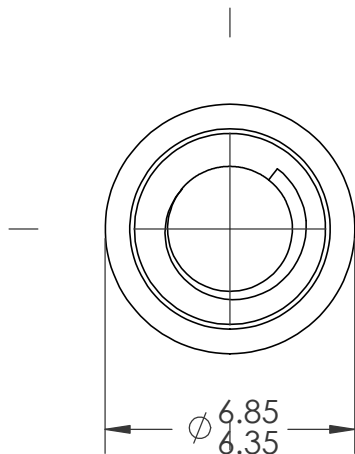

SECTION A-A

NOTE:

1. GRIP RANGE: 2.5-4.5
2. HOLE SIZE: 6.0 +.01/-0.0 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: 6.3 REF
4. LUBRICATION: NONE
5. INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

NEXT ASSY

USED ON

APPLICATION

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
ANGULAR: MACH ± 1 BEND ± 1
ONE PLACE DECIMAL ± 0.3
TWO PLACE DECIMAL ± 0.08

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL

1010 STEEL

FINISH

ZINC WITH CLEAR TRIVELANT
CHROMATE PER SFS-01-001, SC4

DO NOT SCALE DRAWING

NAME

DATE

DRAWN

JH

1/14/26

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:

E-mail: info@sherex.com
www.sherex.com
Phone: 866-474-3739
Fax: 716-875-0358



TITLE:

SMALL FLANGE KNURLED BODY

SIZE DWG. NO.

A CKKM2-470-4.5

REV

A

SCALE: 2:1 WEIGHT:

SHEET 1 OF 1