


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	04/01/26	4792	JH

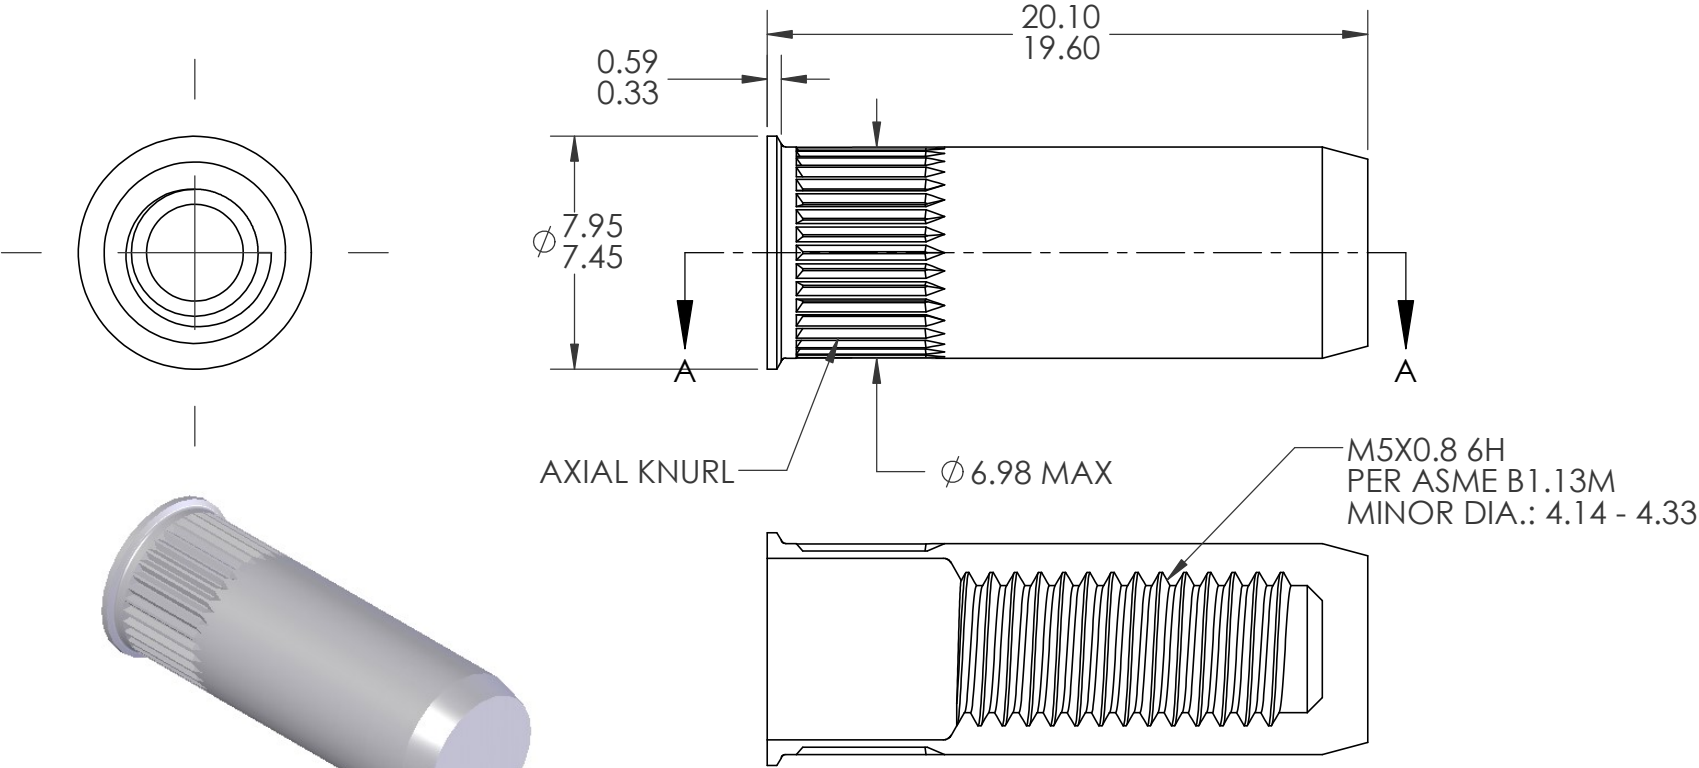

- NOTE:
- GRIP RANGE: 0.5-3.0
 - HOLE SIZE: 7.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 14.5 REF.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN PULL

SECTION A-A
SCALE 4 : 1

PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED:		NAME	DATE		TITLE: SMALL FLANGE KNURLED BODY		
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JH	04/01/26				
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
			MATERIAL	ENG APPR.	JK	15/5/26				
			1010 STEEL	MFG APPR.						
			FINISH	Q.A.						
			ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358						
NEXT ASSY	USED ON						SIZE	DWG. NO.	REV	
							A	CKKM2-580-3.0B	A	
	APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	