


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	06/10/2025	4672	MRA
B	UPDATED BODY DIAMETER	10/06/2025	4714	MRA

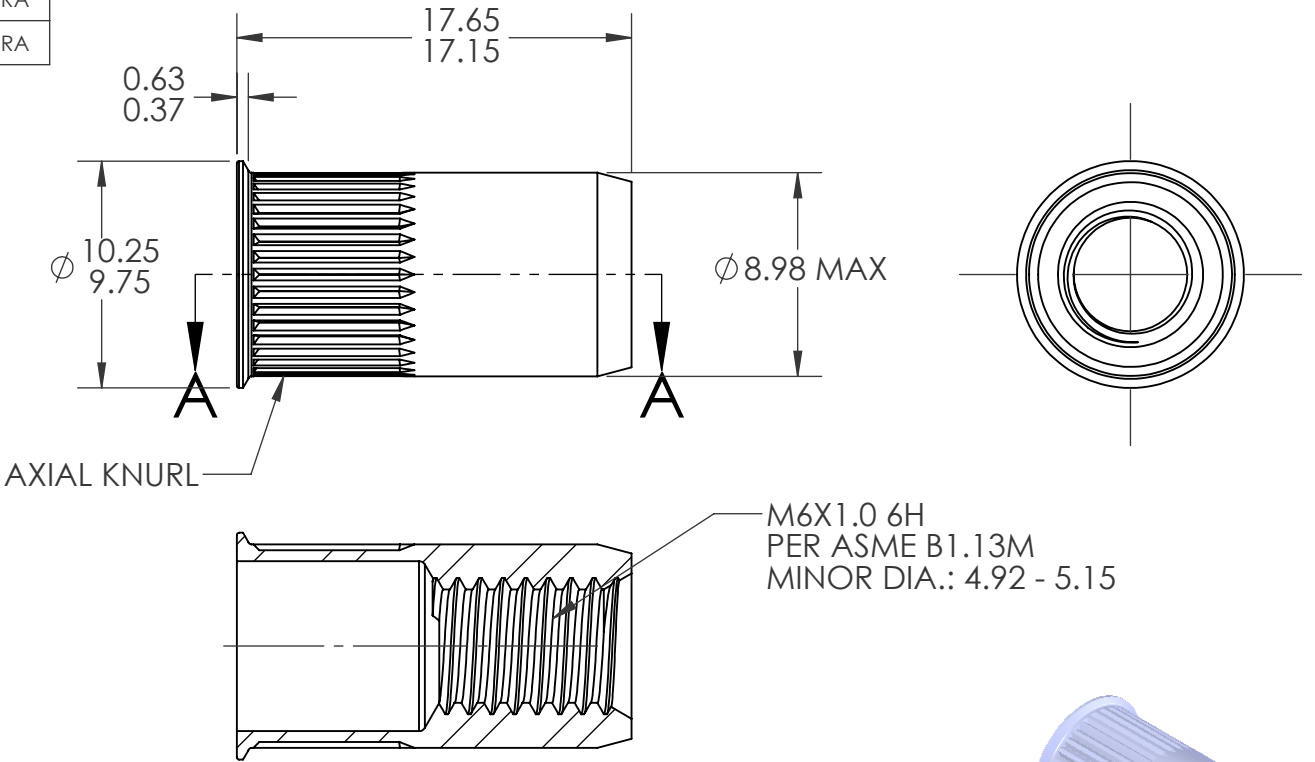

AXIAL KNURL

SECTION A-A

- NOTE:
- GRIP RANGE: 3.0 - 5.5
 - HOLE SIZE: 9.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 8.75 REF.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

			UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
			DIMENSIONS ARE IN MILLIMETERS						
			TOLERANCES:	DRAWN	MRA	6/10/25			
			ANGULAR: MACH±1 BEND ±1	CHECKED					
			TWO PLACE DECIMAL ±.10	ENG APPR.	JVK	6/10/25			
			THREE PLACE DECIMAL ±.05	MFG APPR.					
			INTERPRET GEOMETRIC	Q.A.					
			TOLERANCING PER:	COMMENTS:					
			ASME Y14.5M-1994	E-mail: info@sherex.com					
			MATERIAL	www.sherex.com					
			C1010 STEEL	Phone: 866-474-3739					
			FINISH	Fax: 716-875-0358					
			ZINC WITH CLEAR TRIVALENT CHROMATE						
			PER SFS-01-001, SC4						
NEXT ASSY		USED ON					SIZE	DWG. NO.	REV
							A	CKKM2-610-5.5	B
APPLICATION			DO NOT SCALE DRAWING				SCALE: 3:1	WEIGHT: .0028 kg	SHEET 1 OF 1