


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	06/02/26	4759	JH
B	UPDATED HEAD DIAMETER	20/04/26	4799	JH

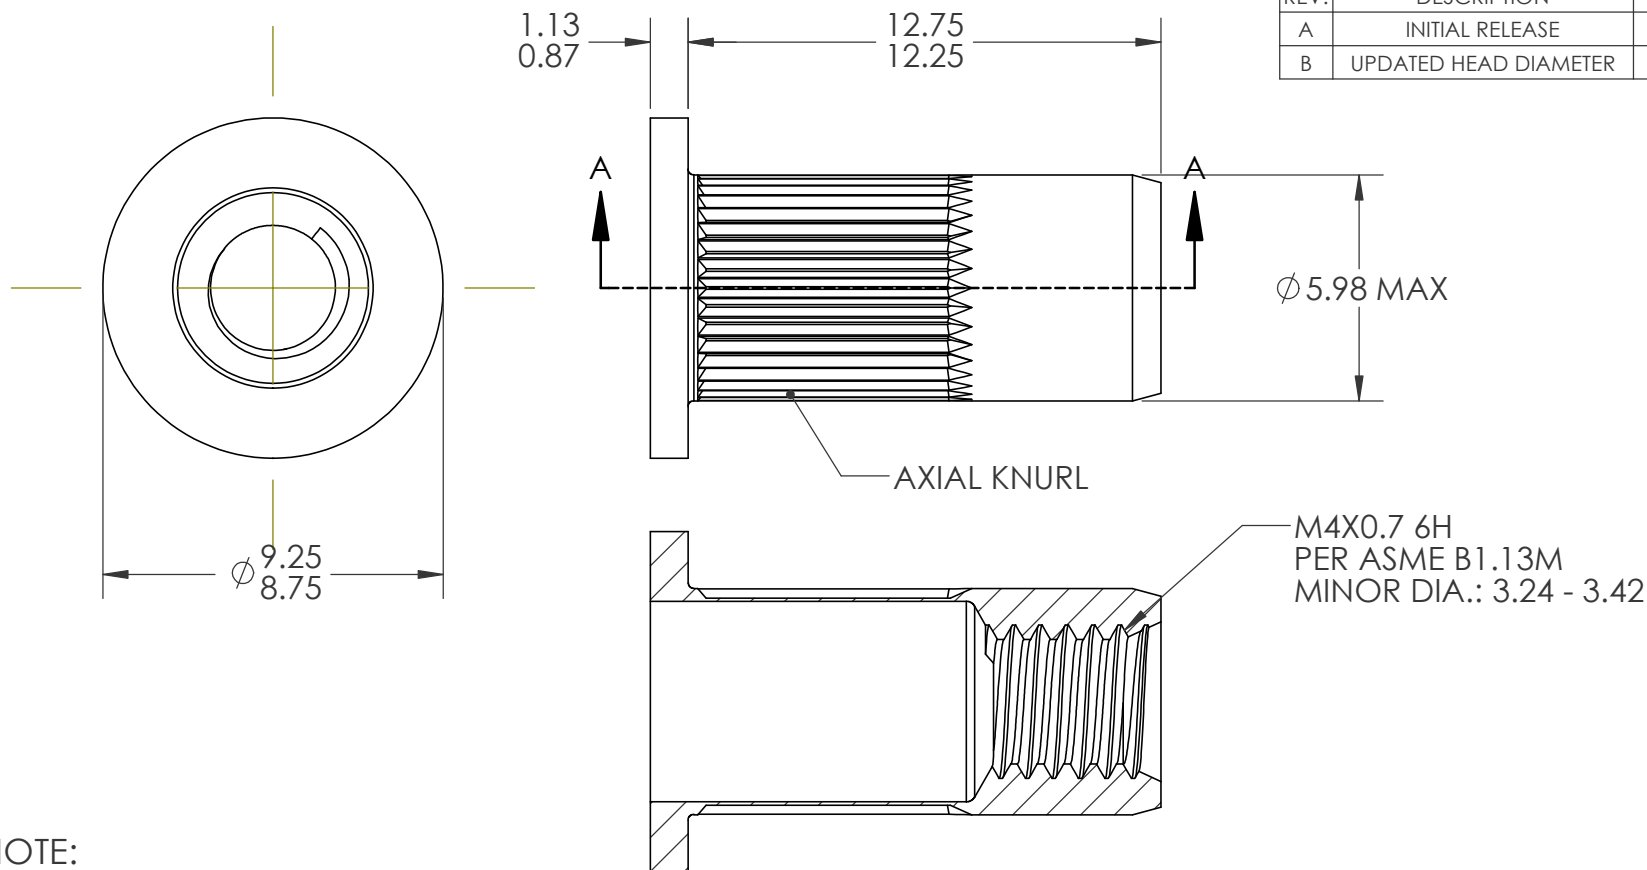

- NOTE:
- GRIP RANGE: 2.5-4.5
 - HOLE SIZE: 6.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 6.3 REF
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE. UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JH	1/14/26	
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED			
			MATERIAL 1010 STEEL	ENG APPR.			
			FINISH ZINC WITH CLEAR TRIVELANT CHROMATE PER SFS-01-001, SC4	MFG APPR.			
NEXT ASSY		USED ON	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358				TITLE: LARGE FLANGE KNURLED BODY
APPLICATION			DO NOT SCALE DRAWING	SIZE DWG. NO.		REV	
				A CKLM2-470-4.5		B	
				SCALE: 2:1 WEIGHT:		SHEET 1 OF 1	