

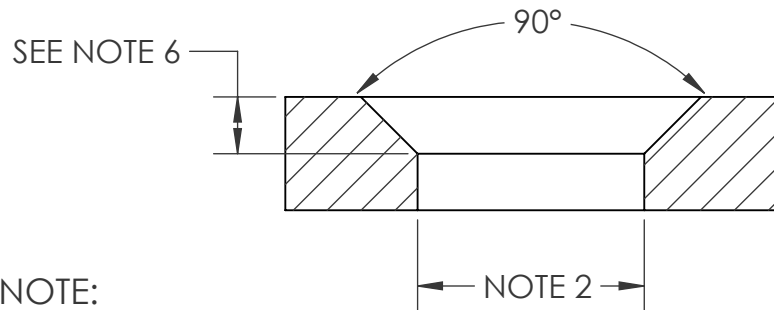



REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	03/26/26	4791	JLC

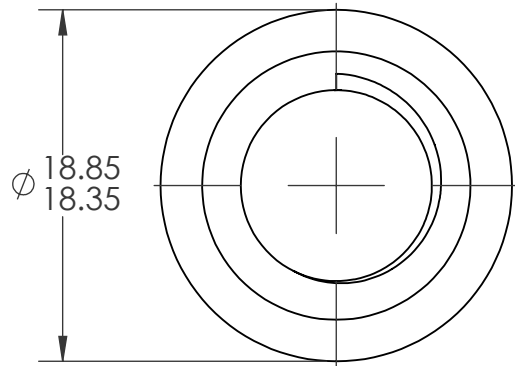

- NOTE:
1. GRIP RANGE: 4.5 - 7.5
 2. HOLE SIZE: 16.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 3. INSTALLED LENGTH: 17.5 REF
 4. LUBRICATION: NONE
 5. INSTALLATION TOOL: SPIN PULL
 6. COUNTERSUNK HOLE DEPTH: 1.7 MAX

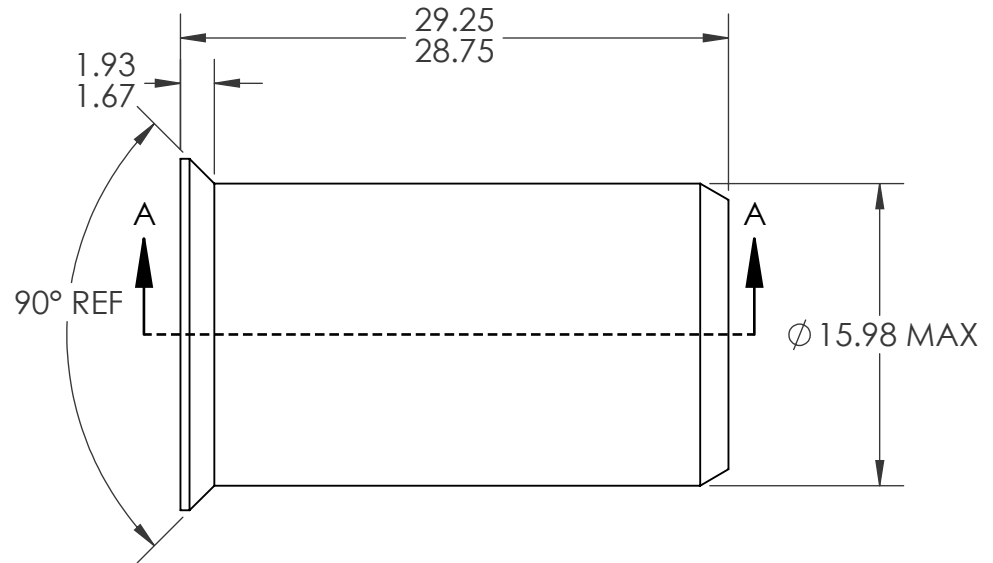

HOLE DETAIL

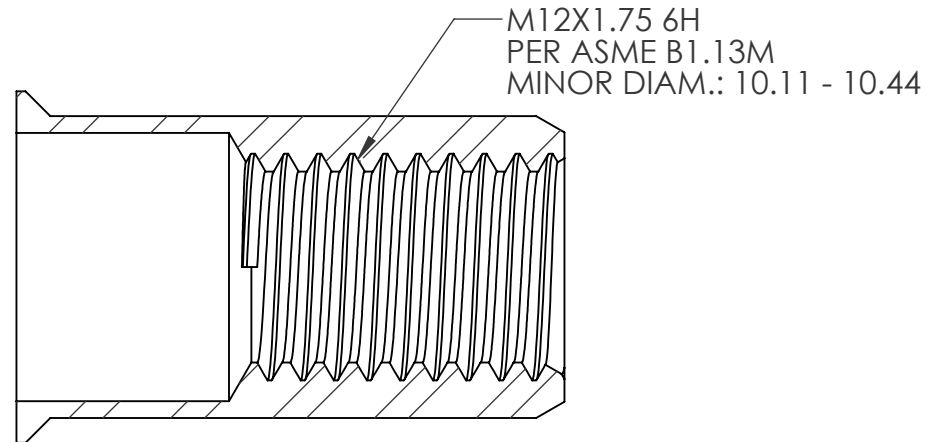

SECTION A-A

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.3 TWO PLACE DECIMAL ± 0.08	DRAWN	JLC	03/26/26				
			CHECKED			TITLE: COUNTERSUNK HEAD SMOOTH			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JVK	03/26/26				
			MFG APPR.						
		MATERIAL	Q.A.						
		1010 STEEL	COMMENTS:						
			E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			SIZE		DWG. NO.	REV
		FINISH				A	COCM2-12175-7.5		A
NEXT ASSY	USED ON	ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4							
APPLICATION		DO NOT SCALE DRAWING				SCALE: 5:2		WEIGHT:	SHEET 1 OF 1

5

4

3

2

1