

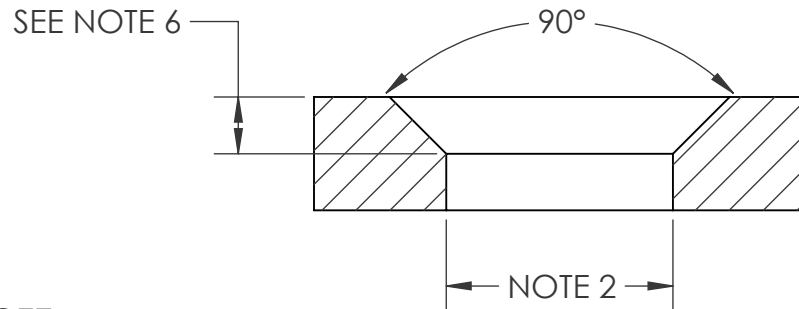
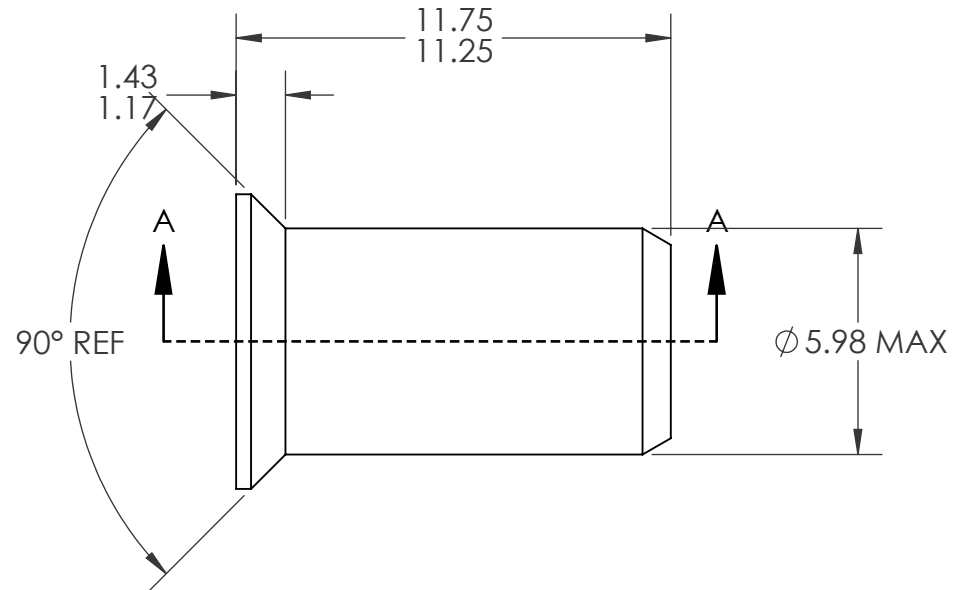


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	3/26/26	4791	JLC

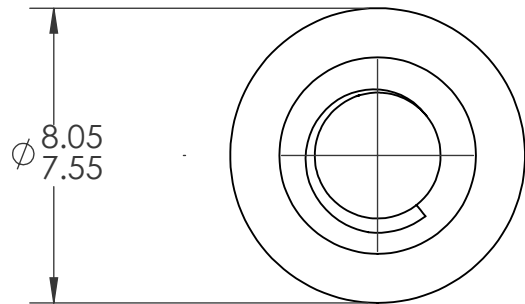

HOLE DETAIL

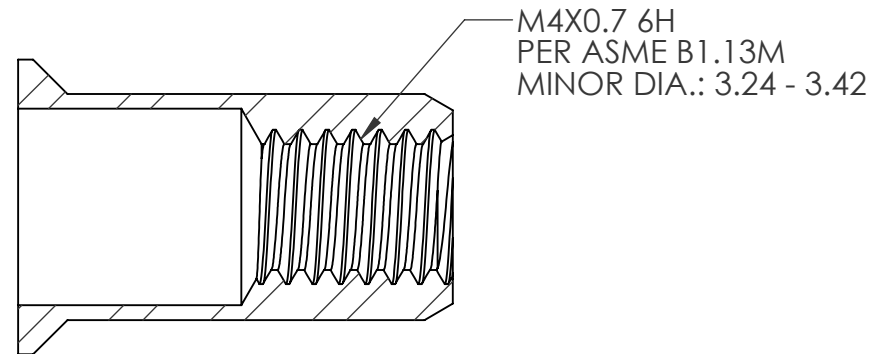

SECTION A-A

NOTE:

- GRIP RANGE: 1.5-3.5
- HOLE SIZE: 6.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 5.9 REF
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL
- COUNTERSUNK HOLE DEPTH: 1.2 MAX


PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN MILLIMETERS	DRAWN	JLC	3/26/26
		TOLERANCES:	CHECKED		
		ANGULAR: MACH ± 1 BEND ± 1	ENG APPR.	JVK	3/26/26
		ONE PLACE DECIMAL ± 0.3	MFG APPR.		
		TWO PLACE DECIMAL ± 0.08	Q.A.		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	COMMENTS:		
		MATERIAL	E-mail: info@sherex.com		
		1010 STEEL	www.sherex.com		
		FINISH	Phone: 866-474-3739		
		ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4	Fax: 716-875-0358		
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			



TITLE:

COUNTERSUNK HEAD SMOOTH

SIZE DWG. NO.

A COCM2-470-3.5

REV

A

SCALE: 5:1 WEIGHT:

SHEET 1 OF 1