

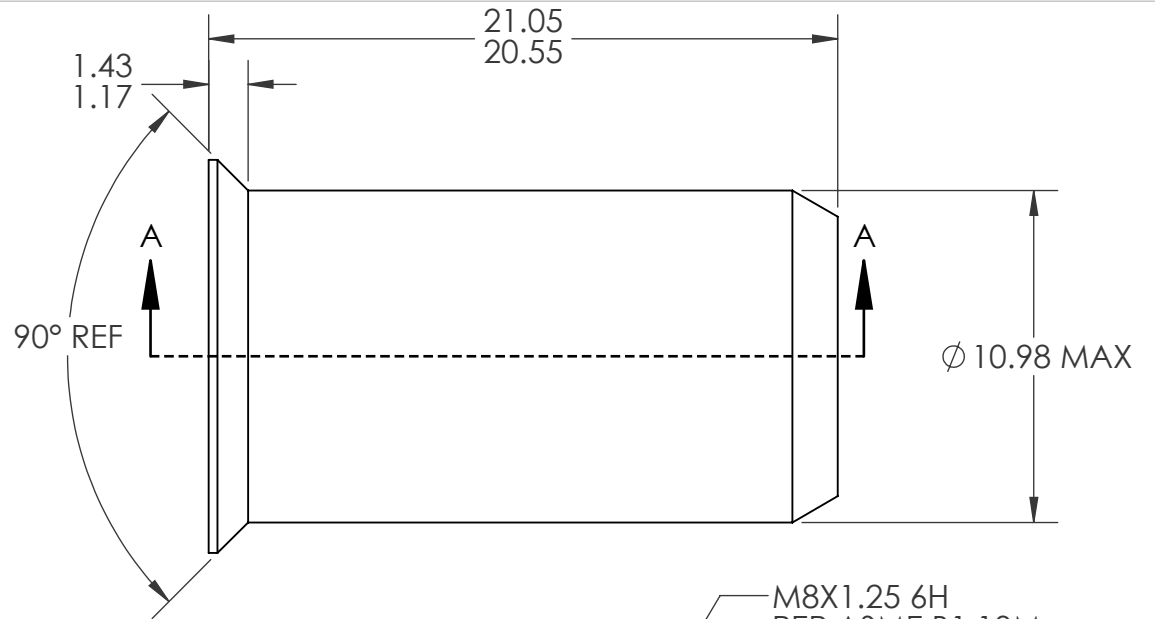



REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	03/26/26	4791	JLC

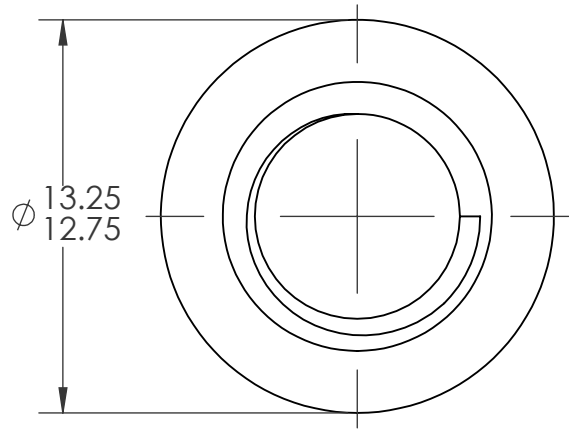

SEE NOTE 6

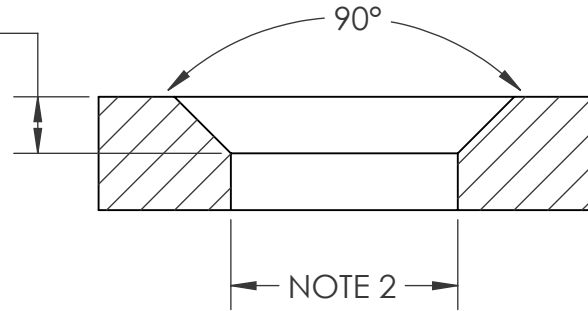

HOLE DETAIL

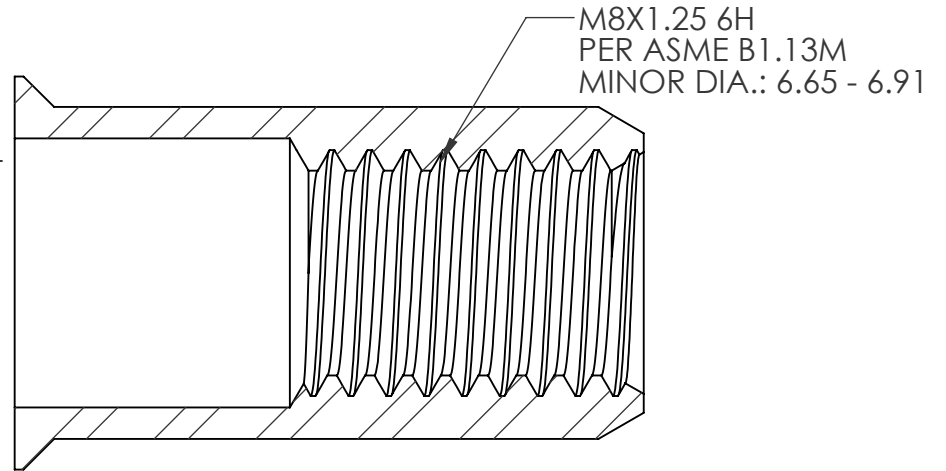

SECTION A-A

NOTE:

- GRIP RANGE: 4.0 - 6.5
- HOLE SIZE: 11.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 11.0 REF
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL
- COUNTERSUNK HOLE DEPTH: 1.2 MAX

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.3 TWO PLACE DECIMAL ± 0.08	DRAWN	JLC	03/26/26				
			CHECKED						
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JVK	03/26/26	TITLE: COUNTERSUNK HEAD SMOOTH			
			MFG APPR.						
		MATERIAL	Q.A.						
		1010 STEEL	COMMENTS:			SIZE DWG. NO. REV A COCM2-8125-6.5 A			
			E-mail: info@sherex.com						
			www.sherex.com						
		FINISH	Phone: 866-474-3739			SCALE: 4:1 WEIGHT: SHEET 1 OF 1			
		ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4	Fax: 716-875-0358						
NEXT ASSY	USED ON								
APPLICATION		DO NOT SCALE DRAWING							

5

4

3

2

1