


Unified Thread (Unit - Inches)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L $\pm .015$	HD $\pm .018$	HT $\pm .005$	D Max.	IL Ref.	HOLE SIZE $+.006/- .000$
CPB2-2520-500	1/4-20 UNC	.280 .500	1.234	.628	.059	.384	.505	.393

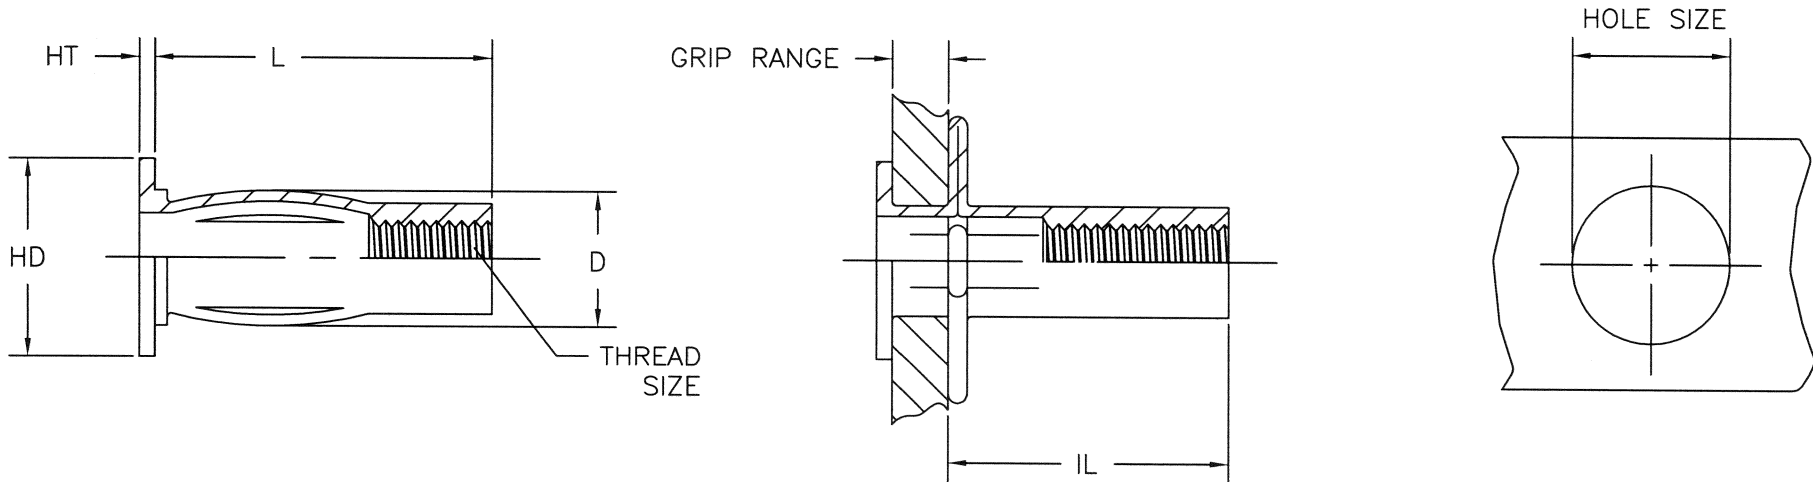

CPB Specifications
Material: Steel 1008/1010

Part Number Description

CPB2-2520-500

Finish: Zinc Plated-Yellow Dichromate
per ASTM B633 Fe/Zn 8, Type II

CPB
Product Style
Slotted Body
Pre-bulbed

2
Material
2-Steel

2520
Thread Size


500
Grip Range

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS. AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA

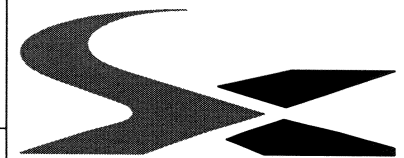

SHEREX FASTENING SOLUTIONS

DRAWN BY:	DATE:	SCALE:	TITLE:
TOO	5/23/05	1:1	CPB STYLE RIVET NUT

CHECK'D BY:	DATE:	E-mail: info@sherex.com www.sherex.com
TOO	5/23/05	

DRAWING NO.

REV	DESCRIPTION	ECN	DATE	APPR'D BY:	DATE:	Phone: 866-474-3739 Fax: 716-681-0270	CPB2-2520-500
				AJP	5/23/05		