
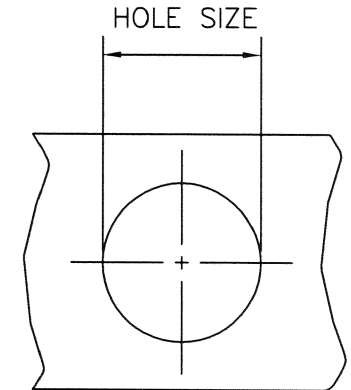
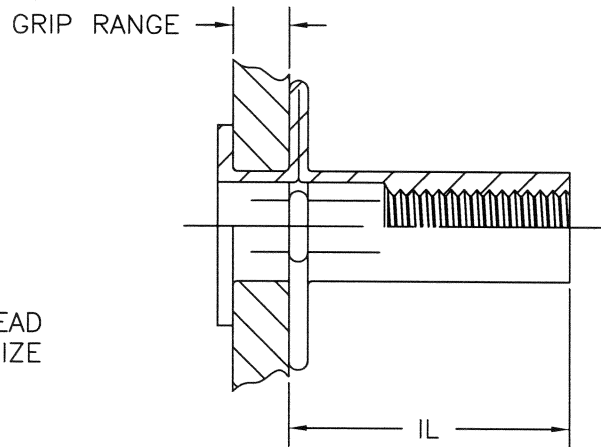


Unified Thread (Unit – Inches)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L ±.015	HD ±.015	HT ±.005	D Max.	IL Ref.	HOLE SIZE +.006/–.000
CPB2–3118–500	5/16–UNC	.280 .500	1.375	.755	.062	.492	.570	.500

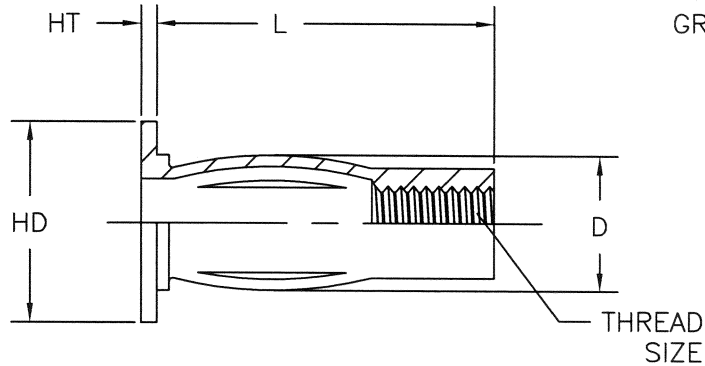

CPB Specifications
Material: Steel 1008/1010

Part Number Description
CPB2–3118–500

Finish: Zinc Plated–Yellow Dichromate
per ASTM B633 Fe/Zn 8, Type II

CPB
Product Style
Slotted Body
Pre–bulbed

2
Material
2–Steel

3118
Thread Size

500
Grip Range

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS. AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



SHEREX FASTENING SOLUTIONS

DRAWN BY: TOO	DATE: 5/23/05	SCALE: 1:1	TITLE: CPB STYLE RIVET NUT
------------------	------------------	---------------	-------------------------------

CHECK'D BY: TOO	DATE: 5/23/05	E–mail: info@sherex.com www.sherex.com Phone: 866–474–3739 Fax: 716–681–0270
APPR'D BY: AJP	DATE: 5/23/05	

DRAWING NO.

CPB2–3118–500

REV	DESCRIPTION	ECN	DATE
-----	-------------	-----	------