
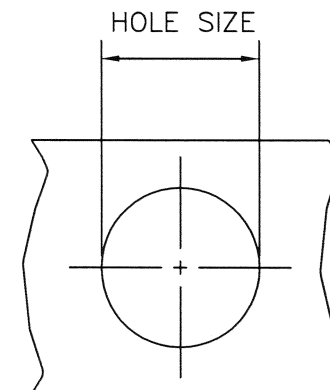
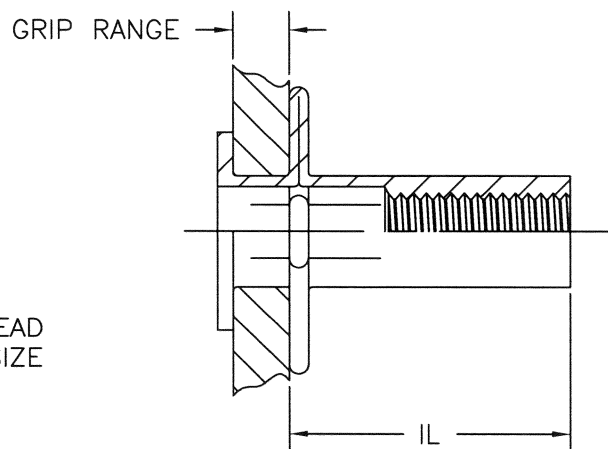


Metric Thread (Unit – Millimeters)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L ±0.38	HD ±0.43	HT ±0.13	D Max.	IL Ref.	HOLE SIZE +0.15/-0.00
CPB2-8125-12.7	M8X1.25 6H	7.10 12.70	34.90	19.23	1.57	12.70	14.48	12.75

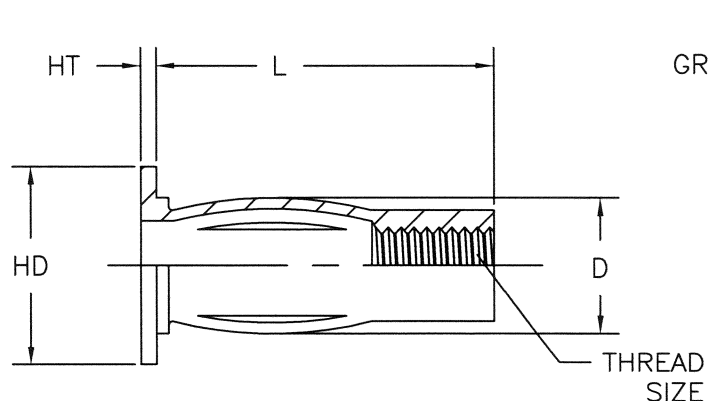

CPB Specifications
Material: Steel 1008/1010

Part Number Description
CPB2-8125-12.7

Finish: Zinc Plated–Yellow Dichromate
per ASTM B633 Fe/Zn 8, Type II

CPB
Product Style
Slotted Body
Pre-bulbed

2
Material
2–Steel

8125
Thread Size

12.7
Grip Range

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS. AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS
1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



SHEREX FASTENING SOLUTIONS

DRAWN BY:	DATE:	SCALE:	TITLE:
TOO	5/23/05	1:1	CPB STYLE RIVET NUT

CHECK'D BY:	DATE:	E-mail: info@sherex.com www.sherex.com
TOO	5/23/05	

APPR'D BY:	DATE:	Phone: 866-474-3739 Fax: 716-681-0270
AJP	5/23/05	

DRAWING NO.

CPB2-8125-12.7

REV	DESCRIPTION	ECN	DATE
-----	-------------	-----	------