


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	9/4/24	4528	PMZ

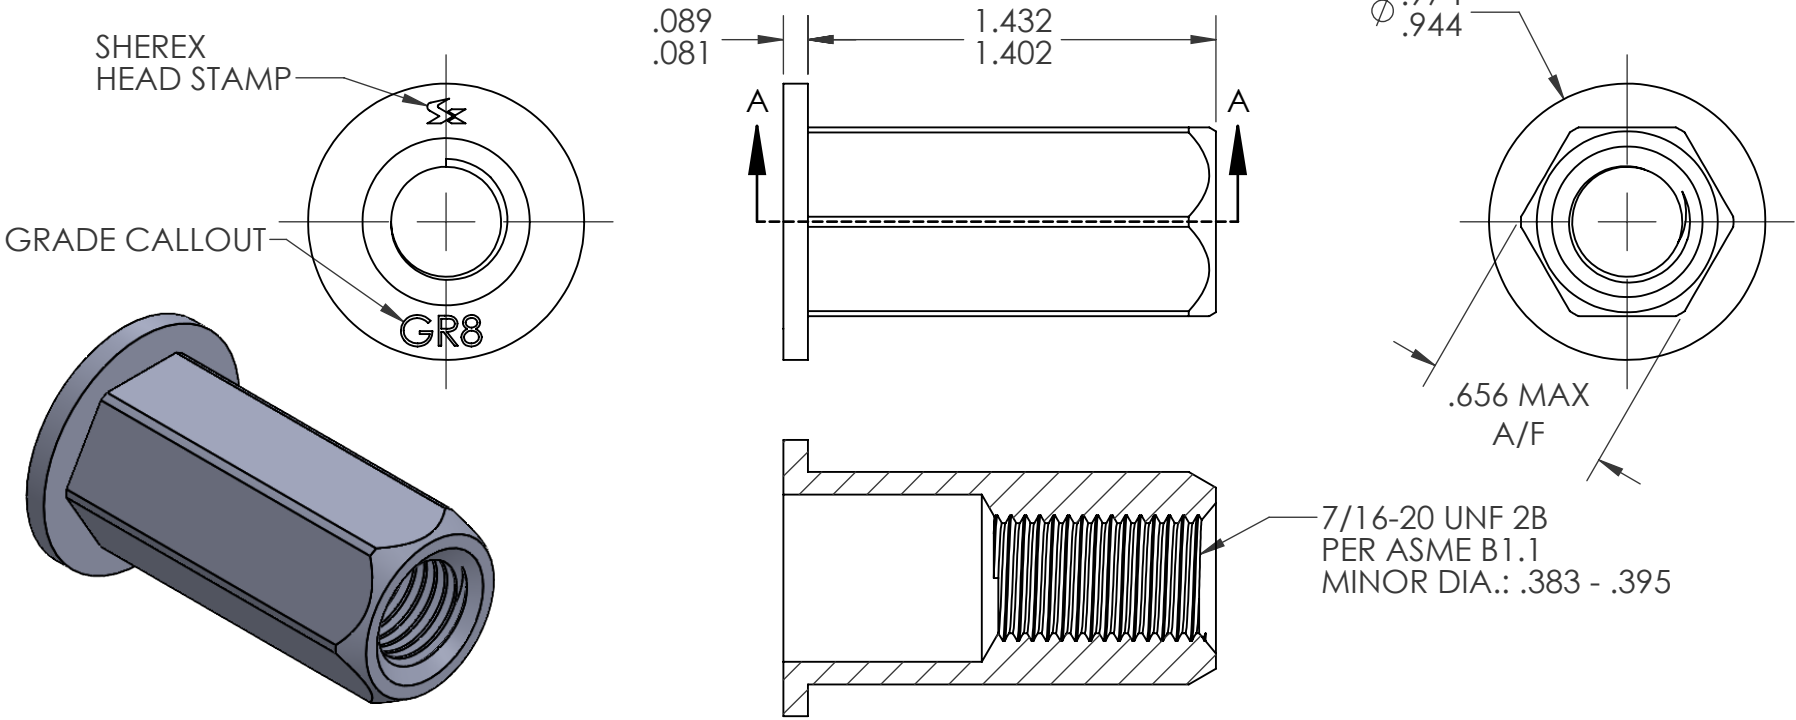

- NOTE:
- GRIP RANGE: .197 - .276
 - HOLE SIZE: .657 +.006/-.000 A/F AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: .984 MAX
 - LUBRICATION: NONE
 - INSTALLATION TOOL: FLEX 18 SPIN PULL
 - THREADS MEET GRADE 8 PROOF LOAD PER SAE J995: 17,805LBF

PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE. UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.			UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
			DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005	DRAWN	PMZ	9/4/24			
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED					
				ENG APPR.	JVK	9/4/24	TITLE: FULL HEX HIGH STRENGTH		
				MFG APPR.	AP	9/4/24			
				Q.A.					
			MATERIAL 10B21	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358				SIZE DWG. NO. A HHS2-4320-276	REV A
			FINISH ZINC PLATE CLEAR TRIVALENT CHROMATE PER SHEREX SFS-01-001 SC1						
	NEXT ASSY	USED ON							
	APPLICATION			DO NOT SCALE DRAWING				SCALE: 3:2	WEIGHT: