
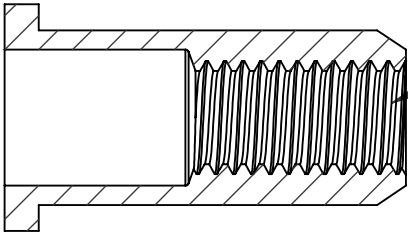
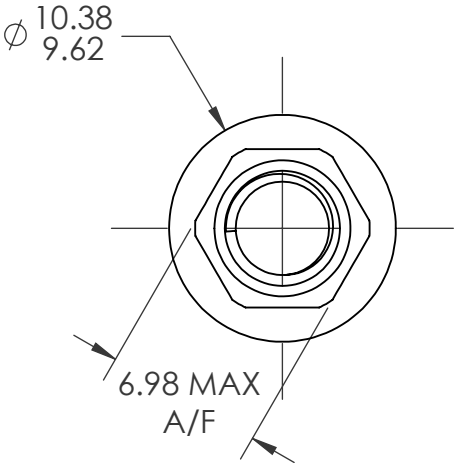
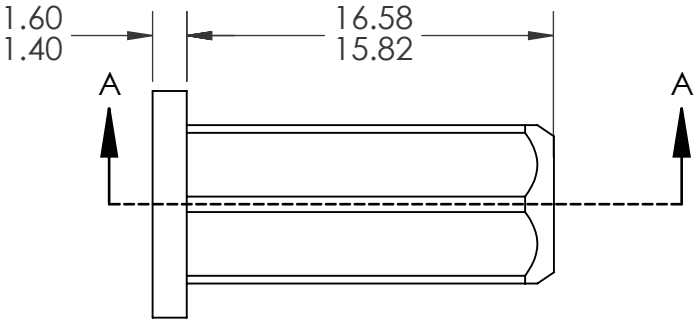


| REVISIONS |                 |         |      |          |
|-----------|-----------------|---------|------|----------|
| REV.      | DESCRIPTION     | DATE    | ECN  | INITIALS |
| A         | INITIAL RELEASE | 8/30/24 | 4528 | PMZ      |

SHEREX HEAD STAMP

CLASS CALLOUT

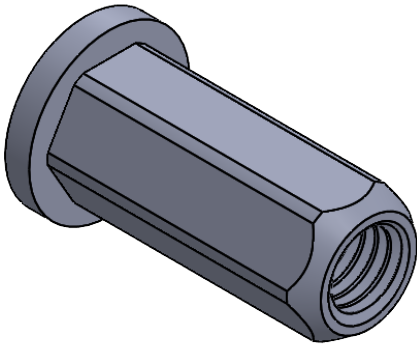

M5X0.8 6H  
PER ASME B1.13M  
MINOR DIA.: 4.13 - 4.33

SECTION A-A  
SCALE 3 : 1

- NOTE:
- GRIP RANGE: 1.0 - 3.0
  - HOLE SIZE: 7.00 +0.15/-0.00 A/F AFTER ALL APPLIED FINISHES.
  - INSTALLED LENGTH: 12.40 MAX
  - LUBRICATION: NONE
  - INSTALLATION TOOL: FLEX 5P/5S SPIN-PULL
  - THREAD MEETS CLASS 10 PROOF LOAD PER ISO 898-2: 14.8kN


**PROPRIETARY AND CONFIDENTIAL**

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

|             |         |                                                                                                                                                   |                         |      |         |
|-------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|---------|
|             |         | UNLESS OTHERWISE SPECIFIED:                                                                                                                       |                         | NAME | DATE    |
|             |         | DIMENSIONS ARE IN MILLIMETERS<br>TOLERANCES:<br>ANGULAR: MACH $\pm 1$ BEND $\pm 1$<br>ONE PLACE DECIMAL $\pm 0.3$<br>TWO PLACE DECIMAL $\pm 0.08$ | DRAWN                   | PMZ  | 8/30/24 |
|             |         |                                                                                                                                                   | CHECKED                 |      |         |
|             |         | INTERPRET GEOMETRIC<br>TOLERANCING PER:<br>ASME Y14.5M-1994                                                                                       | ENG APPR.               | JVK  | 8/30/24 |
|             |         |                                                                                                                                                   | MFG APPR.               | AP   | 8/30/24 |
|             |         | MATERIAL                                                                                                                                          | Q.A.                    |      |         |
|             |         | 10B21                                                                                                                                             | COMMENTS:               |      |         |
|             |         |                                                                                                                                                   | E-mail: info@sherex.com |      |         |
|             |         |                                                                                                                                                   | www.sherex.com          |      |         |
|             |         |                                                                                                                                                   | Phone: 866-474-3739     |      |         |
|             |         |                                                                                                                                                   | Fax: 716-875-0358       |      |         |
|             |         | FINISH                                                                                                                                            |                         |      |         |
| NEXT ASSY   | USED ON | ZINC PLATE CLEAR<br>TRIVALENT CHROMATE PER<br>SHEREX SFS-01-001 SC1                                                                               |                         |      |         |
| APPLICATION |         | DO NOT SCALE DRAWING                                                                                                                              |                         |      |         |



TITLE:  
FULL HEX HIGH STRENGTH

|            |              |              |
|------------|--------------|--------------|
| SIZE       | DWG. NO.     | REV          |
| <b>A</b>   | HHS2-580-3.0 | <b>A</b>     |
| SCALE: 3:1 |              | WEIGHT:      |
|            |              | SHEET 1 OF 1 |