
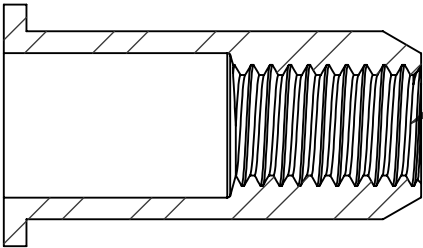
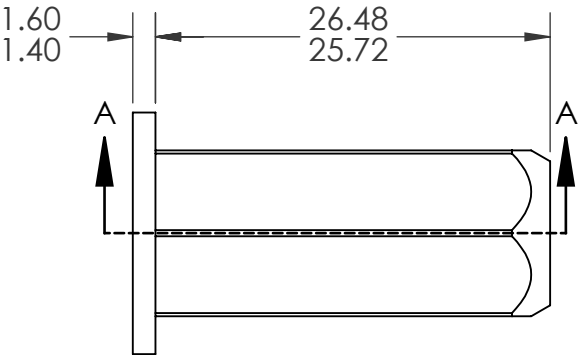




REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	9/4/24	4528	PMZ

SHEREX HEAD STAMP

CLASS CALLOUT

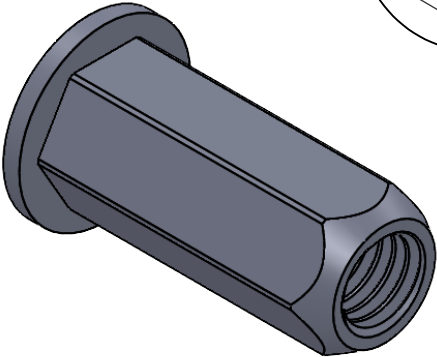

SECTION A-A

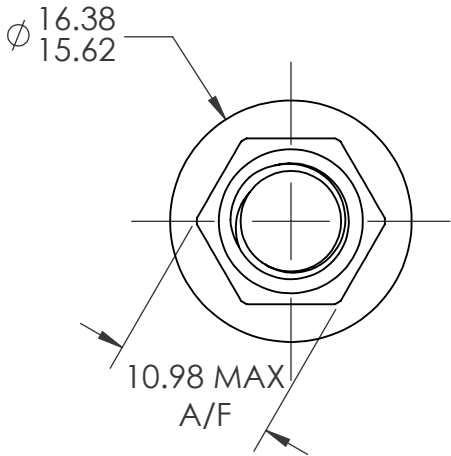

M8X1.25 6H
PER ASME B1.13M
MINOR DIA.: 6.65 - 6.91

- NOTE:
- GRIP RANGE: 5.0 - 7.0
 - HOLE SIZE: 11.00 +0.15/-0.00 A/F AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 16.10 MAX
 - LUBRICATION: NONE
 - INSTALLATION TOOL: FLEX 18/RIV 943 SPIN PULL
 - THREAD MEETS CLASS 10 PROOF LOAD PER ISO 898-2: 38.1kN


PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.3 TWO PLACE DECIMAL ± 0.08 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 MATERIAL 10B21 FINISH ZINC PLATE CLEAR TRIVALENT CHROMATE PER SHEREX SFS-01-001 SC1		NAME	DATE
			DRAWN	PMZ	9/4/24
			CHECKED		
			ENG APPR.	JVK	9/4/24
			MFG APPR.	AP	9/4/24
			Q.A.		
			COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358		
NEXT ASSY	USED ON	APPLICATION	DO NOT SCALE DRAWING		



TITLE:
FULL HEX HIGH STRENGTH

SIZE	DWG. NO.	REV
A	HHS2-8125-7.0	A
SCALE: 2:1		WEIGHT:
SHEET 1 OF 1		