
REVISIONS									
REV.	DESCRIPTION	DATE	ECN	INITIALS					
Α	INITIAL RELEASE	8/28/24	4526	PMZ					

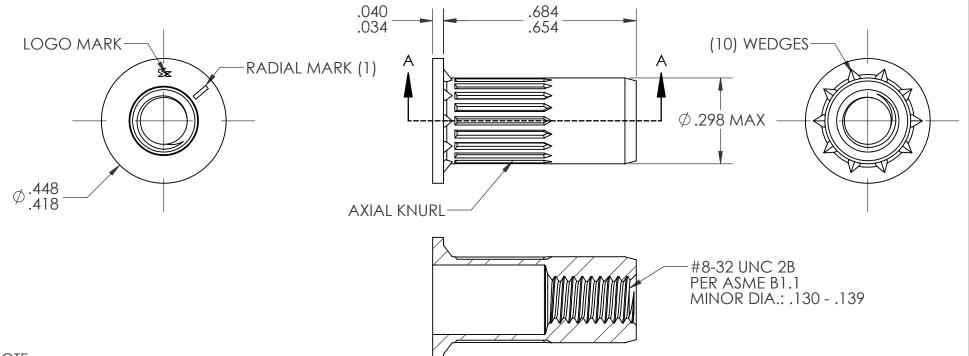

## NOTE:

GRIP RANGE: .118-.217

HOLE SIZE: .300 +.006/-.000 AFTER ALL APPLIED FINISHES. INSTALLED LENGTH: .413 MAX. 2.

3.

4.

LUBRICATION: NONE INSTALLATION TOOL: SPIN PULL

CUSTOMER APPROVAL:			UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH. ± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 MATERIAL		NAME	DATE				
				DRAWN	PMZ	8/28/24				
DATE				CHECKED			TITLE:			
DATE:				ENG APPR.	JVK	8/28/24	#8-32 OPEN END LARGE FLANGE OPTISERT			
				MFG APPR.						
PROPRIETARY AND CONFIDENTIAL				Q.A.			FL	ANGE OPTIS	EKI	
PROPRIETART AND CONFIDEN  THIS DRAWING, AND THE INFORMATION CONTAINS HERIN, ARE THE PROPERTY OF SHEREX AND ARE TO BE USED IN ANY MANNER DETRIMENTTO THE INTEREST OF THE COMPANY.			302 STAINLESS	L man. modeonorox.com		SIZE DWG. NO. REV				
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/IDRAWING WITHOUT NOTICE.  UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATI REFERENCED ON THIS DRAWING WILL PERTAIN TO	NEXT ASSY	USED ON	NONE	www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358		<b>A</b> OPT1-0832-217			Α	
THE MOST RECENT AND ACTIVE REVISION.		CATION	DO NOT SCALE DRAWING			SCALE: 3:	WEIGHT:	SHEET 1 OF		

SECTION A-A

3

2