
REVISIONS									
REV.	DESCRIPTION	DATE	ECN	INITIAL					
Α	INITIAL RELEASE	8/16/24	4519	PMZ					

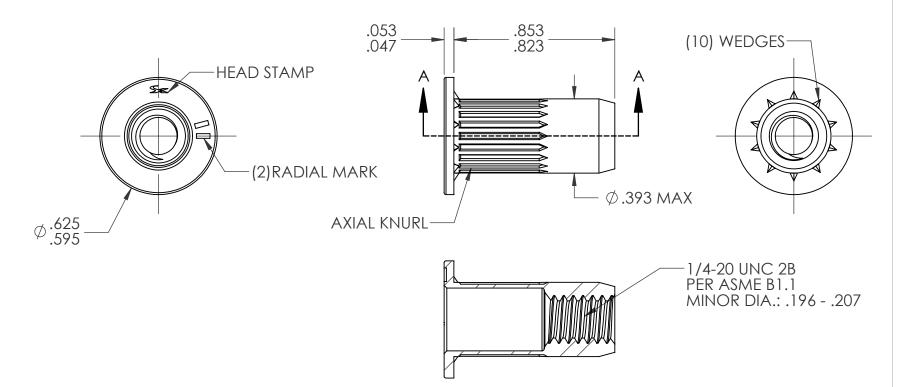

SECTION A-A

NOTE:

GRIP RANGE: .236 - .335

HOLE SIZE: .394 +.006/-0.00 AFTER ALL APPLIED FINISHES. INSTALLED LENGTH: .433 MAX LUBRICATION: NONE

- 3.

SEKI		SIZE DWG.			COMMENTS:	302 STAINLESS		PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CON- TAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPAND.	
7551					Q.A.	MATERIAL			
N END LARGE OPTISERT	- 20 OPEN END FLANGE OPTIS				MFG APPR.	TOLERANCING PER: ASME Y14.5M-1994			
ET GEOMETRIC ENG APPR. JVK 8/16/24 TITLE:		INTERPRET GEOMETRIC							
		TITI C.			CHECKED	ANGULAR: MACH ± 1 BEND ±1 ONE PLACE DECIMAL ±.01 TWO PLACE DECIMAL ±.002		_	
			8/16/24	PMZ	DRAWN	DIMENSIONS ARE IN INCHES TOLERANCES:		_	
			DATE	NAME	e	UNLESS OTHERWISE SPECIFIED:			
			DATE	NAME	D:	UNLESS OTHERWISE SPECIFIED:		STALLATION TOOL: SPIN-PU	