


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	2/20/25	4605	JLC

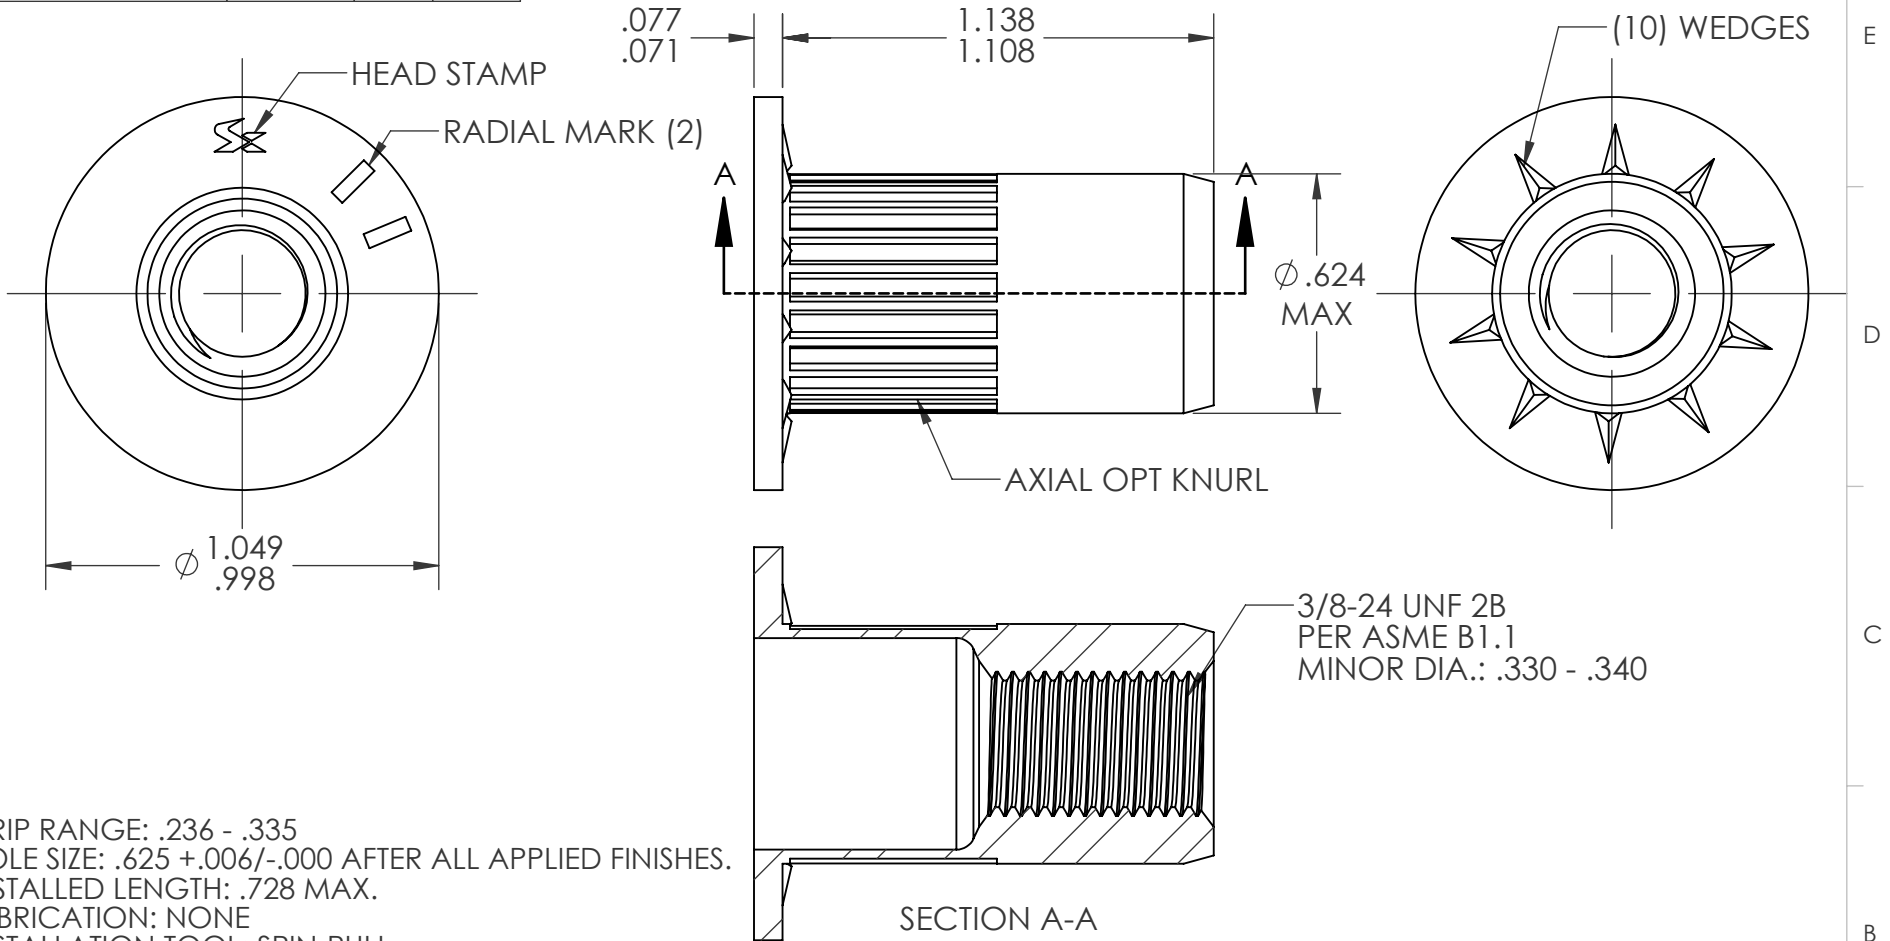

NOTE:

1. GRIP RANGE: .236 - .335
2. HOLE SIZE: .625 +.006/-0.000 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: .728 MAX.
4. LUBRICATION: NONE
5. INSTALLATION TOOL: SPIN-PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005	DRAWN	JLC	1/23/25				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	JVK	1/23/25	TITLE: 3/8-24 UNF OPEN END LARGE FLANGE OPTISERT			
		302 STAINLESS	MFG APPR.						
		FINISH	Q.A.						
		NONE	COMMENTS:			SIZE DWG. NO. REV A OPT1-3724-335 A			
			E-mail: info@sherex.com						
			www.sherex.com						
NEXT ASSY	USED ON		Phone: 866-474-3739			SCALE: 2:1 WEIGHT: SHEET 1 OF 1			
			Fax: 716-875-0358						
APPLICATION		DO NOT SCALE DRAWING							