
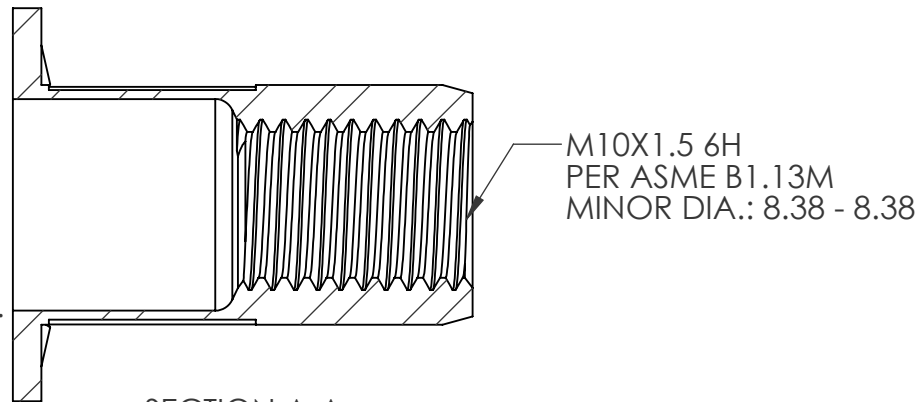
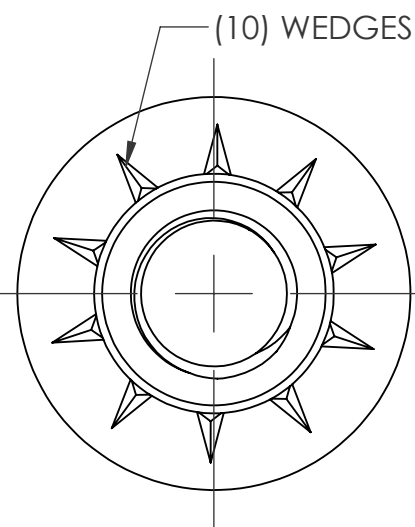
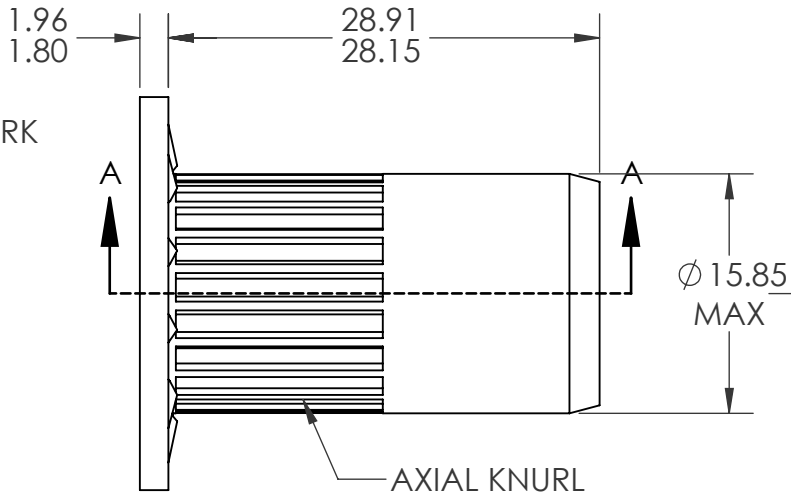


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	10/11/2024	4547	ARG

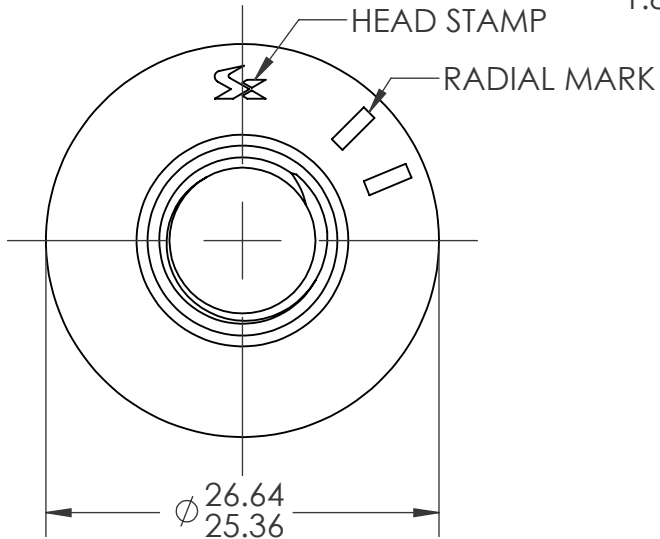

- NOTE:
- GRIP RANGE: 6.0 - 8.5
 - HOLE SIZE: 15.87 +0.15/-0.00 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 18.5 MAX.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN-PULL
 - THREADS MEET CLASS 8 PROOF LOAD: 50.5kN PER ISO 898-2.

CUSTOMER APPROVAL:		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.3 TWO PLACE DECIMAL ± 0.08 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 MATERIAL C1008/C1010 STEEL FINISH ZINC PLATE CLEAR TRIVALENT CHROMATE PER SFS-01-001 SC1 DO NOT SCALE DRAWING	NAME ARG JVK Q.A. COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358	DATE 10/11/24							
DATE:											
PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE. UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.											
NEXT ASSY											
USED ON		TITLE: M10 OPEN END LARGE FLANGE OPTISERT									
APPLICATION		SIZE DWG. NO.		REV							
		A OPT2-1015-8.5		A							
		SCALE: 2:1		WEIGHT:		SHEET 1 OF 1					