


REVISIONS									
REV.	DESCRIPTION	DATE	ECN	INITIAL					
Α	INITIAL RELEASE	03/05/21	3794	FCG					
В	UPDATE BODY DIAMETER	09/07/22	4105	MRA					



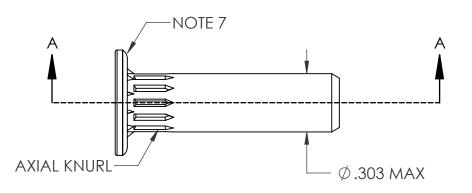



NOTE:

GRIP RANGE: .059 - .118

HOLE SIZE: .300 +.006/-.000 AFTER ALL APPLIED FINISHES.

3. INSTALLED LENGTH: 0.951 MAX.

4. INSTALLED THREAD DEPTH: .787 MIN. IN MIN. GRIP

5. LUBRICATION: NONE

INSTALLATION TOOL: SPIN-PULL

DEPOSIT PLASTISOL ALONG OUTER GROOVE OF THE HEAD. SEAL

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.	NEXT ASSY	USED ON	ZINC PLATE CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC1	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			1
TAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.			DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .002 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 MATERIAL C1008/C1010				S
PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CON-							
				Q.A.			(
				MFG APPR.			,
				ENG APPR.	CL	03/05/21	11
				CHECKED			TI
				DRAWN	FCG	03/05/21	_
			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	(
L MUST NOT CONTACT V	, LD 0 L0.	I					_

(10) WEDGES

-#10-32 UNF 2B PER ASME B1.1

MINOR DIA .: .156 - .164 **SECTION A-A**



ΓITLE:

2

#10-32 LARGE FLANGE CLOSED END OPTISERT W/ SEAL

SIZE DWG. NO. **REV** OPT2-1032-118BS В

SCALE: 2:1 WEIGHT:

SHEET 1 OF 1