

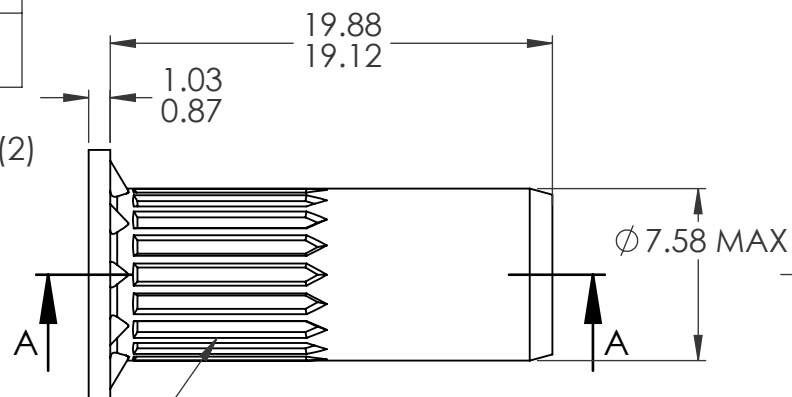



REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	10/7/2020	3692	TDJ
B	UPDATE BODY DIAMETER	09/07/22	4105	MRA

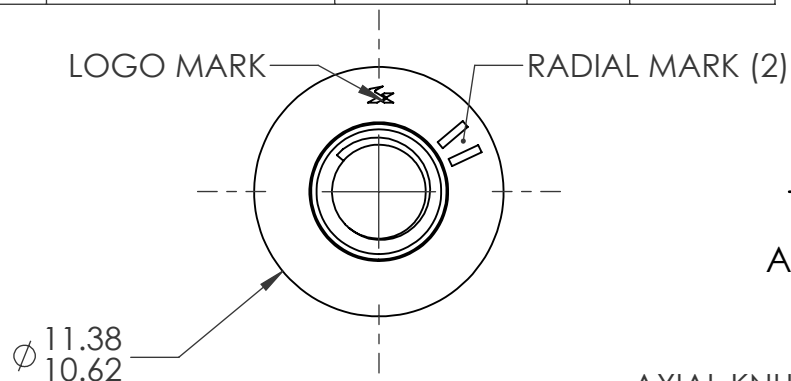

AXIAL KNURL

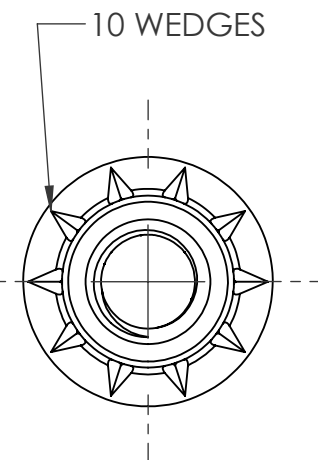

M5X0.8 6H
PER ASME B1.13M
MINOR DIA.: 4.13-4.33

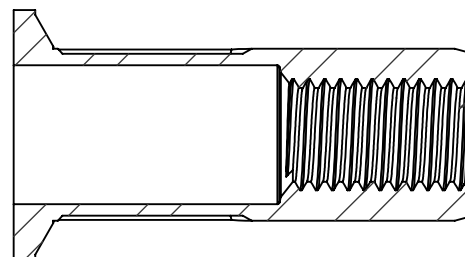

SECTION A-A

NOTE:

1. GRIP RANGE: 5.5 - 8.0
2. HOLE SIZE: 7.60 +0.15-0.00 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: 10.5 MAX.
4. LUBRICATION: NONE
5. INSTALLATION TOOL: SPIN PULL

CUSTOMER APPROVAL:

DATE:

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
ANGULAR: MACH ± 1 BEND ± 1
ONE PLACE DECIMAL ± 0.3
TWO PLACE DECIMAL ± 0.08

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL

C1008/C1010

FINISH

ZINC PLATE CLEAR TRIVALENT
CHROMATE PER SFS-01-001; SC1

NAME

DATE

DRAWN

TDJ

10/7/2020

CHECKED

CL

10/7/2020

ENG APPR.

JVK

10/7/2020

MFG APPR.

Q.A.

COMMENTS:

E-mail: info@sherex.com

www.sherex.com

Phone: 866-474-3739

Fax: 716-875-0358



TITLE:

M5 OPEN END LARGE
FLANGE OPTISERT

SIZE DWG. NO.

A OPT2-580-8.0

REV

B

SCALE: 3:1 WEIGHT:

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED
HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT
TO BE USED IN ANY MANNER DETRIMENTAL TO THE
INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO
REVISE PART/DRAWING WITHOUT NOTICE.
UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS
REFERENCED ON THIS DRAWING WILL PERTAIN TO
THE MOST RECENT AND ACTIVE REVISION.

NEXT ASSY

USED ON

APPLICATION

DO NOT SCALE DRAWING