
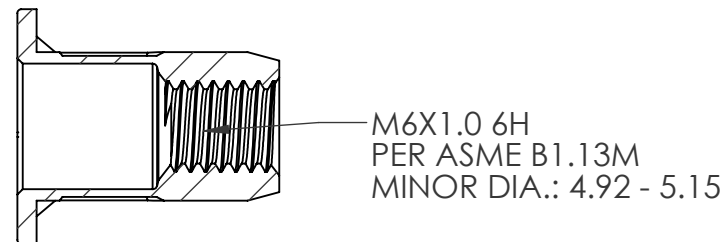
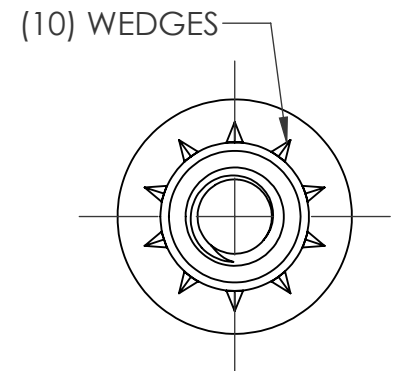
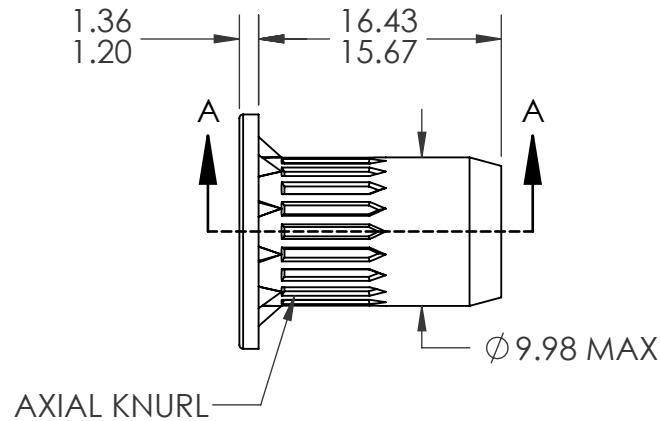


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	7/30/2020	3657	ARG
B	UPDATE BODY DIAMETER & GRIP RANGE	09/07/22	4105	MRA

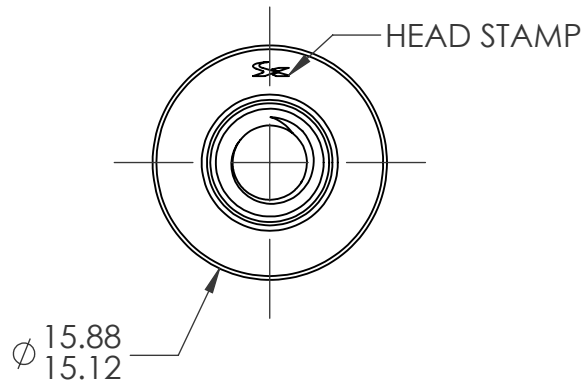

SECTION A-A

NOTE:

- GRIP RANGE: 1.5 - 3.5
- HOLE SIZE: 10.00 +0.15/-0.00 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 11.0 MAX
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN-PULL
- THREADS MEET CLASS 8 PROOF LOAD: 17.2kN PER ISO 898-2

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	ARG	7/30/20				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	JVK	7/30/20	TITLE: M6 OPEN END LARGE FLANGE OPTISERT			
		C1008/C1010	MFG APPR.						
		FINISH	Q.A.						
		ZINC PLATE CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC1	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358						
NEXT ASSY	USED ON					SIZE	DWG. NO.		REV
						A	OPT2-610-3.5		B
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT:	SHEET 1 OF 1