


REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	10/30/08	1107

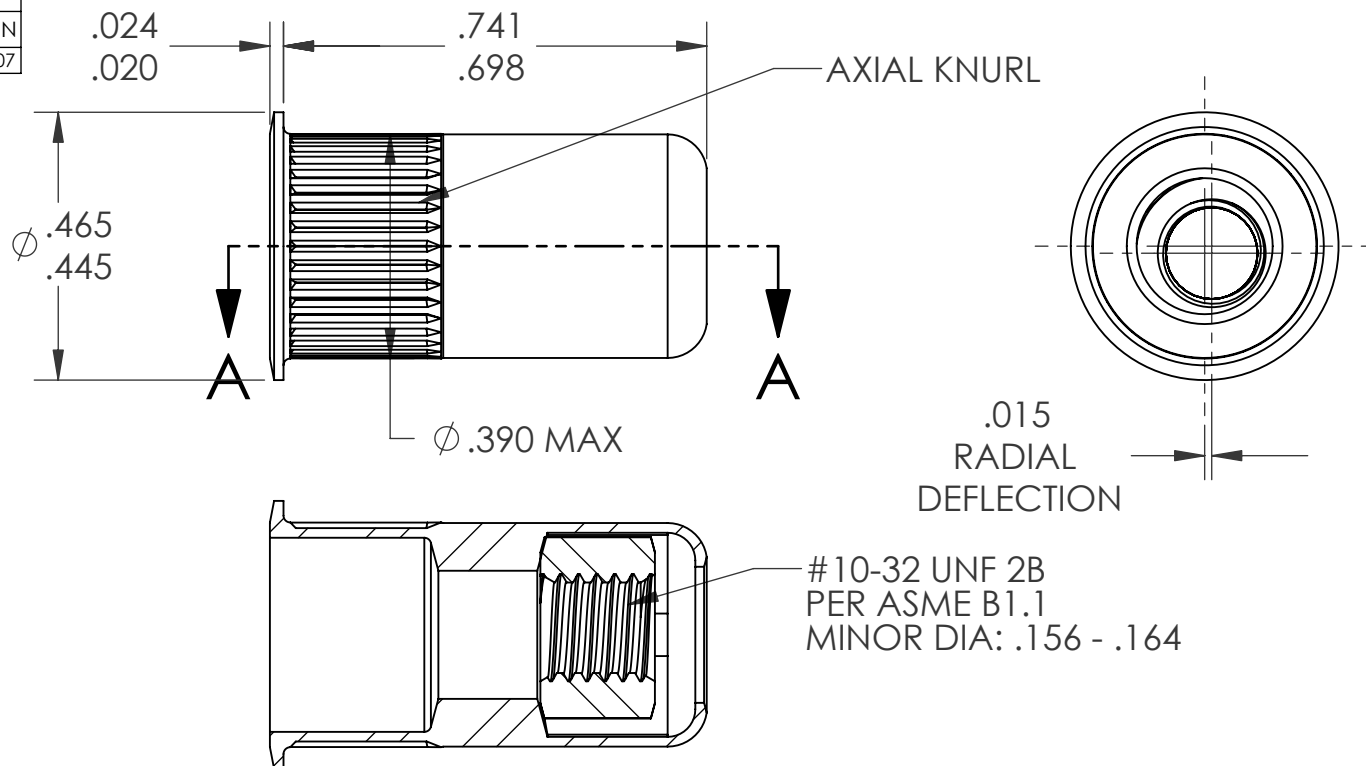

NOTE:

1. GRIP RANGE: .027 - .150
2. HOLE SIZE: ϕ .391 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: .522 REF.
4. LUBRICATION: NONE
5. INSTALLATION TOOL: MS 50 SPIN-PULL (ANVIL - MA-357-1032RF)

SECTION A-A

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX, AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.002	DRAWN	JVK	10/30/08			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED					
		MATERIAL BODY: C1008/1010 NUT: MED. CARBON STEEL	ENG APPR.	JVK	10/30/08			
		FINISH BODY AND NUT: ZINC PLATE (CLEAR TRIVALENT CHROMATE RoHS COMPLIANT; 8-12 um	MFG APPR.	AP	11/13/08			
			Q.A.			TITLE: SMALL FLANGE RIV-FLOAT®		
			COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358					
						SIZE DWG. NO.		REV
						A RFK2-1032-150		A
NEXT ASSY	USED ON					SCALE: 2:1 WEIGHT: .0051 kg		SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING						