


REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	10/30/08	1107

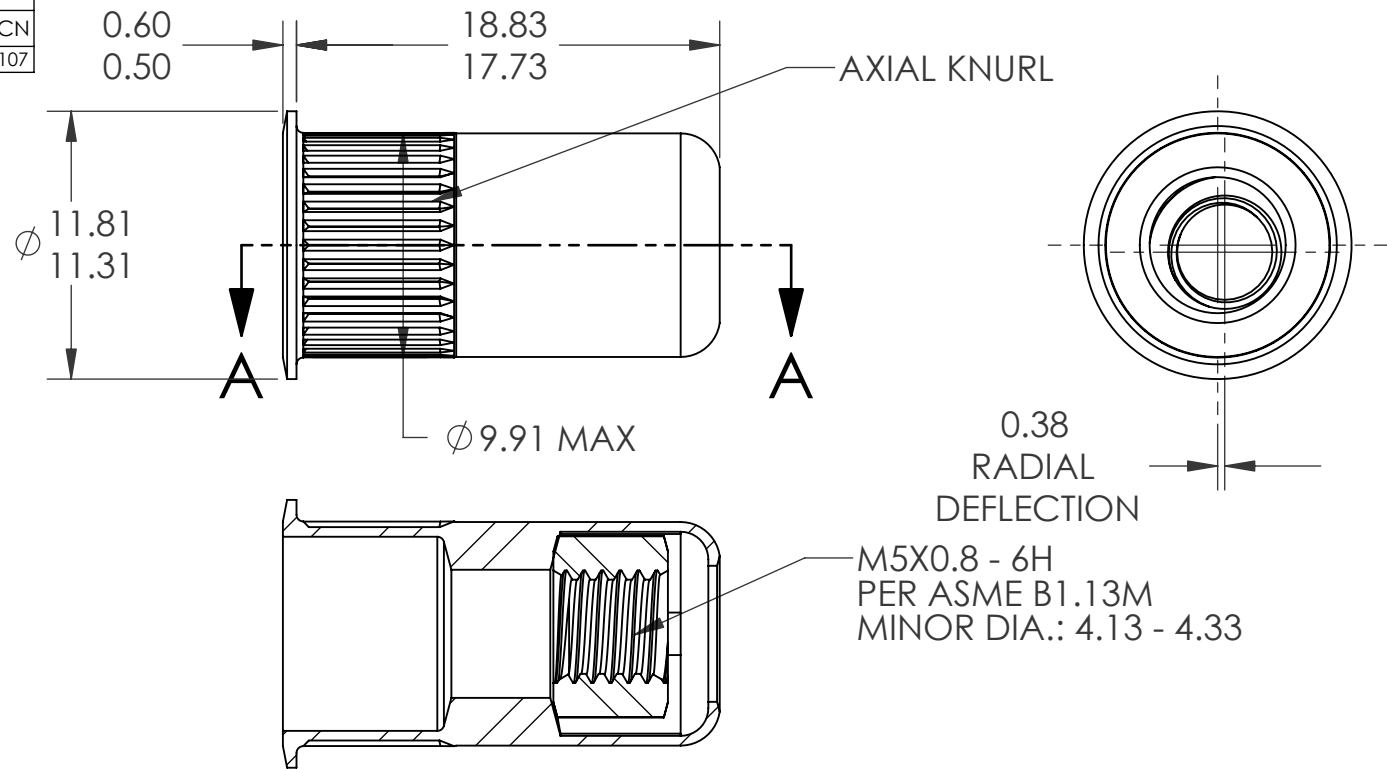

NOTE:

1. GRIP RANGE: 0.7 - 3.8
2. HOLE SIZE: $\phi 10.00 +0.15/-0.00$ AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: 13.25 REF.
4. LUBRICATION: NONE
5. INSTALLATION TOOL: MS 50 SPIN-PULL (ANVIL - MA-357-M5RF)

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 TWO PLACE DECIMAL ±.25 THREE PLACE DECIMAL ±.125	DRAWN	JVK	10/30/08				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	JVK	10/30/08	TITLE: SMALL FLANGE RIV-FLOAT®			
		BODY: C1008/1010 NUT: MED. CARBON STEEL	MFG APPR.	AP	11/13/08				
		FINISH	Q.A.						
		BODY AND NUT: ZINC PLATE (CLEAR TRIVALENT CHROMATE RoHS COMPLIANT: 8-12 um	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358						
NEXT ASSY	USED ON					SIZE	DWG. NO.		REV
						A	RFK2-580-3.8		A
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT: .0051 kg	SHEET 1 OF 1