

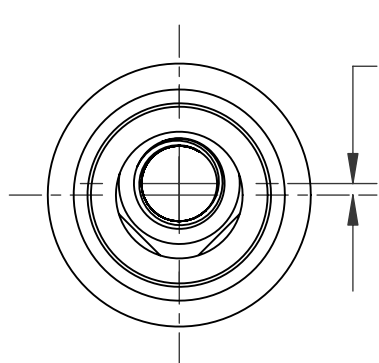



REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	11/4/08	1107

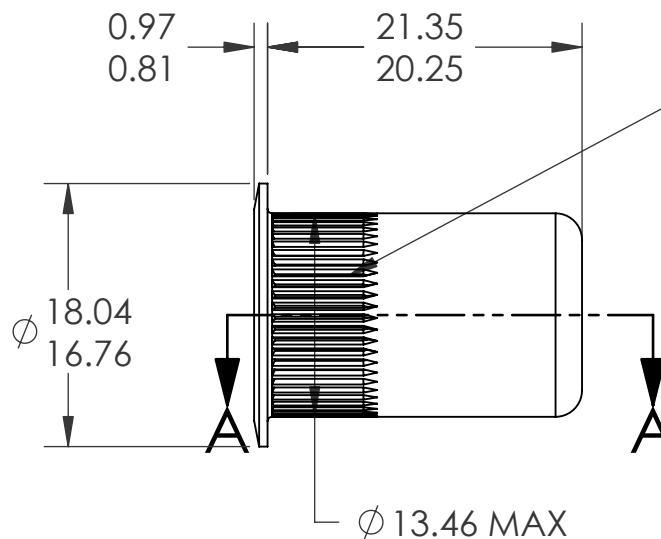

0.76
RADIAL
DEFLECTION



AXIAL KNURL



M6X1.0 - 6H
PER ASME B1.13M
MINOR DIA.: 4.92 - 5.15

SECTION A-A

NOTE:

- GRIP RANGE: 0.7 - 3.8
- HOLE SIZE: $\varnothing 13.50 +0.15/-0.00$ AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 16.00 REF.
- INSTALLED THREAD DEPTH: N/A
- LUBRICATION: NONE
- INSTALLATION TOOL: MS 50 (ANVIL - MA-357-M6RF)

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.10 TWO PLACE DECIMAL ± 0.05 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 MATERIAL BODY: C1008/1010 NUT: MED. CARBON STEEL FINISH BODY AND NUT: ZINC PLATE W/ CLEAR TRIVALENT CHROMATE RoHS COMPLIANT; 8-12 μ m	NAME JVK JVK AP Q.A.	DATE 11/3/08 11/4/08 11/13/08	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			



TITLE:

LARGE FLANGE RIV FLOAT

SIZE	DWG. NO.	REV
A	RFL2-610-3.8	A
SCALE: 2:1	WEIGHT: .0113 kg	SHEET 1 OF 1