
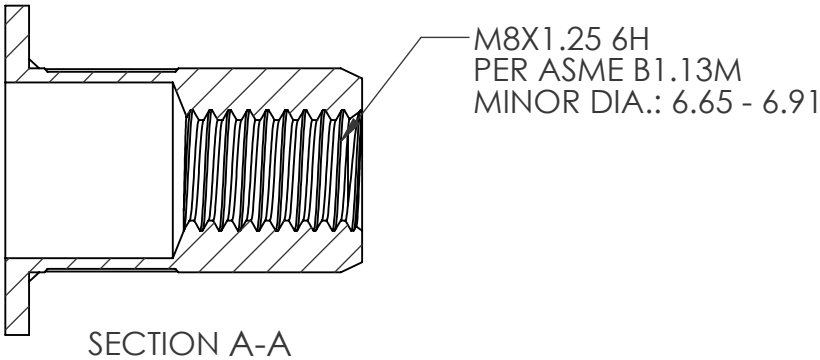

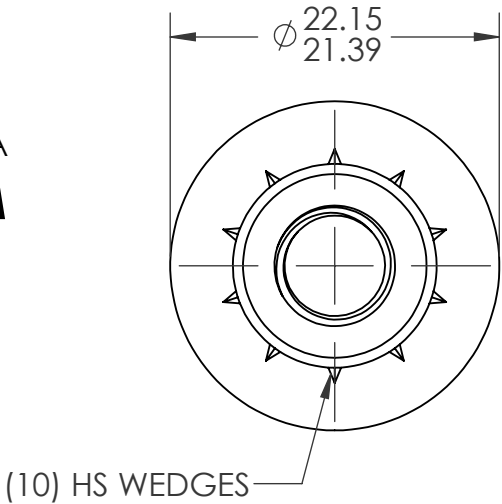
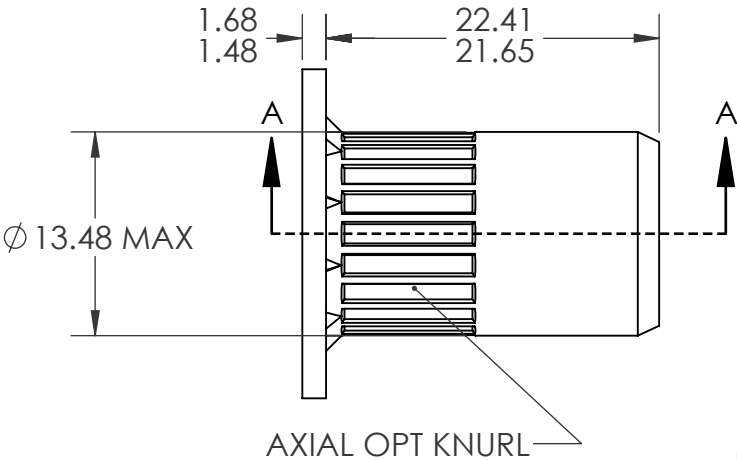


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	7/14/25	4681	JLC

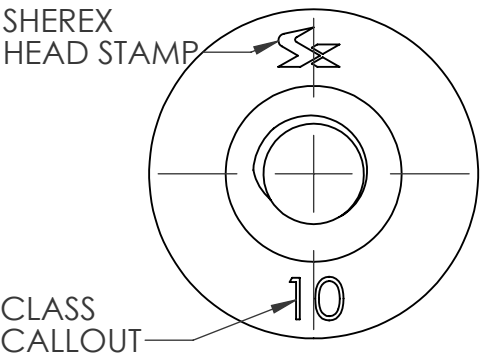

- NOTE:
- GRIP RANGE: 3.5 - 5.5
 - HOLE SIZE: 13.50 +0.15/-0.00 AFTER ALL APPLIED FINISHES
 - INSTALLED LENGTH: 15.00 MAX
 - LUBRICATION: NONE
 - INSTALLATION TOOL: FLEX 5 SPIN PULL
 - THREAD MEETS CLASS 10 PROOF LOAD PER ISO 898-2: 38.1kN


PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JLC	5/27/25
			CHECKED		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JVK	5/27/25
			MFG APPR.		
		MATERIAL	Q.A.		
		10B21 STEEL	COMMENTS:		
			E-mail: info@sherex.com		
			www.sherex.com		
			Phone: 866-474-3739		
			Fax: 716-875-0358		
		FINISH			
		ZINC PLATE CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC1			
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			



TITLE:
LARGE FLANGE ROUND BODY

SIZE DWG. NO.	REV
A RHS2-8125-5.5	A
SCALE: 2:1	WEIGHT:
SHEET 1 OF 1	