REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	2/27/17	2555
B	HEAT TREAT WAS 480 - 540 HV, MAIN DIMENSION NOW IN MM	3/27/17	2615
C	MATERIAL UPDATE	7/12/2018	3056

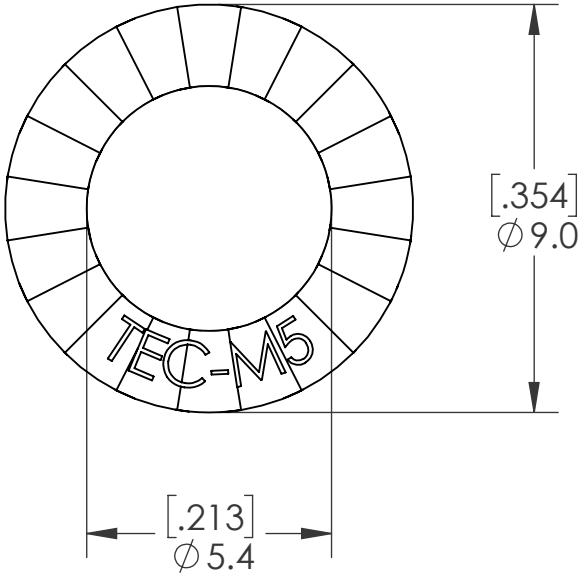

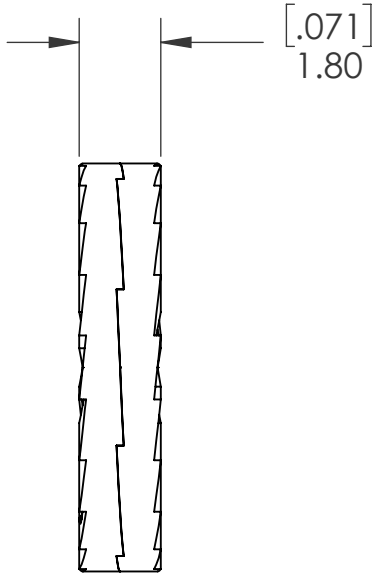

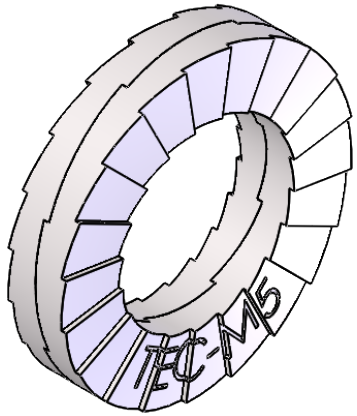

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM [INCHES]
TOLERANCES:
ANGULAR: MACH ± 1 BEND ±1
I.D. TOLERANCE: ±0.1 [±.004]
O.D. TOLERANCE: ±0.2 [±.008]
THICKNESS TOLERANCE: ±0.25 [±.01]

INTERPRET GEOMETRIC TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL
SCM435 OR 4130 STEEL, HT: THROUGH HARDEN 465 HV MIN

FINISH
DELTA PROTEKT BASE COAT (KL100) & TOP COAT (VH302GZ)

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	MTB	2/27/17
CHECKED		
ENG APPR.	JVK	2/27/17
MFG APPR.		
Q.A.		

COMMENTS:

E-mail: info@disc-lock.com
www.disc-lock.com
Phone: 866-474-3739
Fax: 716-875-0358

TECSERIES
A SHEREX FASTENING SOLUTIONS PRODUCT

DESCRIPTION:

TEC WASHER GLUED PAIR
5MM, #10

SIZE	PART NO.:	REV
A	TEC-M5	C

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.

SHEREX FASTENING SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

DRAWING NO.:
TEC-M5

5 4 3 2 1