

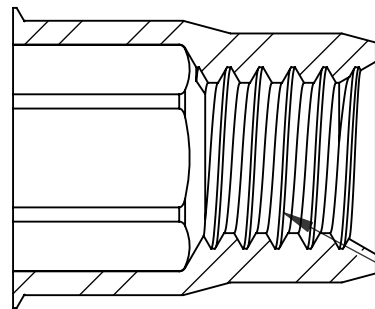
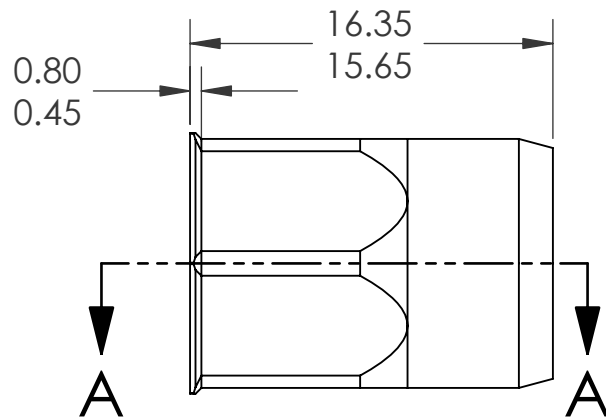




SECTION A-A

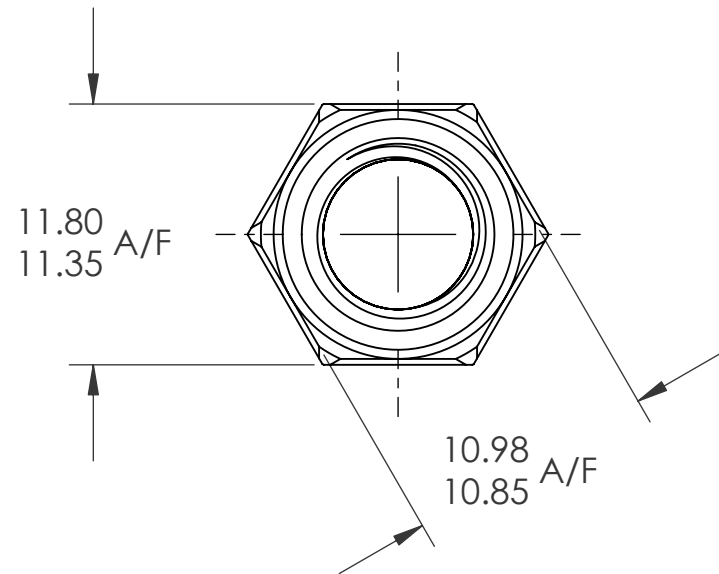

M8X1.25 6H
PER ASME B1.13M
MINOR DIA.: 6.65 - 6.91

NOTE:

1. GRIP RANGE: 0.5 - 3.0
2. HOLE SIZE: 11.0 +0.1/-0.0 A/F AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: MS 50 SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX, AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JVK	3/20/08				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	JVK	3/20/08	TITLE: LOW PROFILE, SEMI HEX, OPEN END			
		316 STAINLESS	MFG APPR.	TB	8/25/08				
		FINISH	Q.A.			SIZE DWG. NO. REV A TU-316M8HUKO30 A			
		PASSIVATE	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358						
NEXT ASSY	USED ON					SCALE: 2:1 WEIGHT: .0049 kg SHEET 1 OF 1			
APPLICATION		DO NOT SCALE DRAWING							