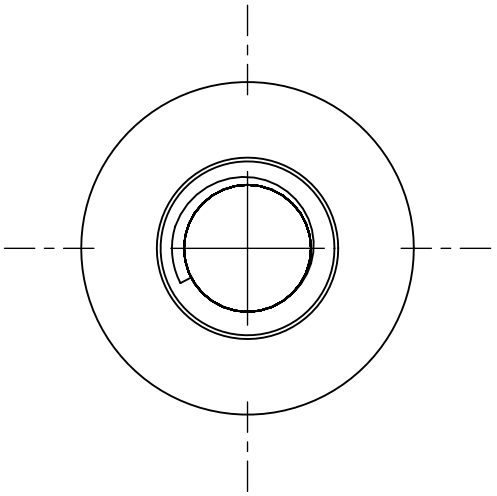

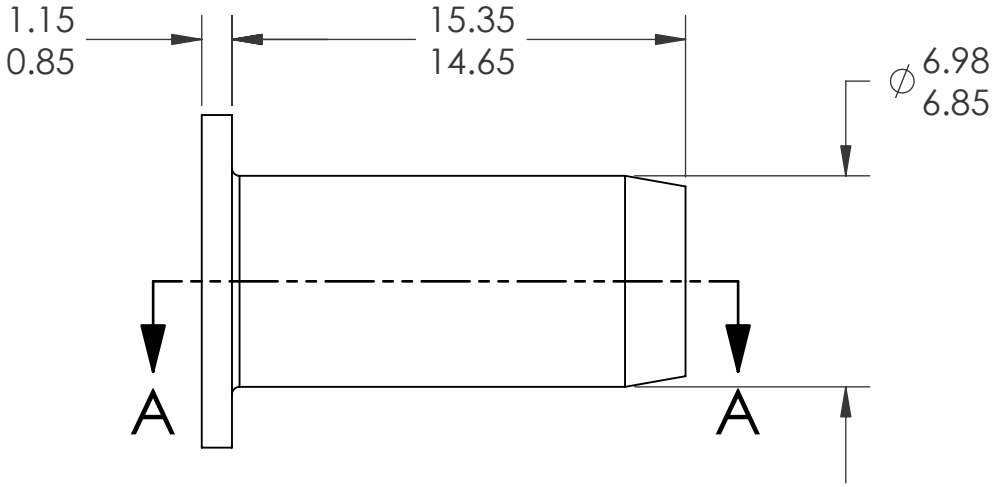

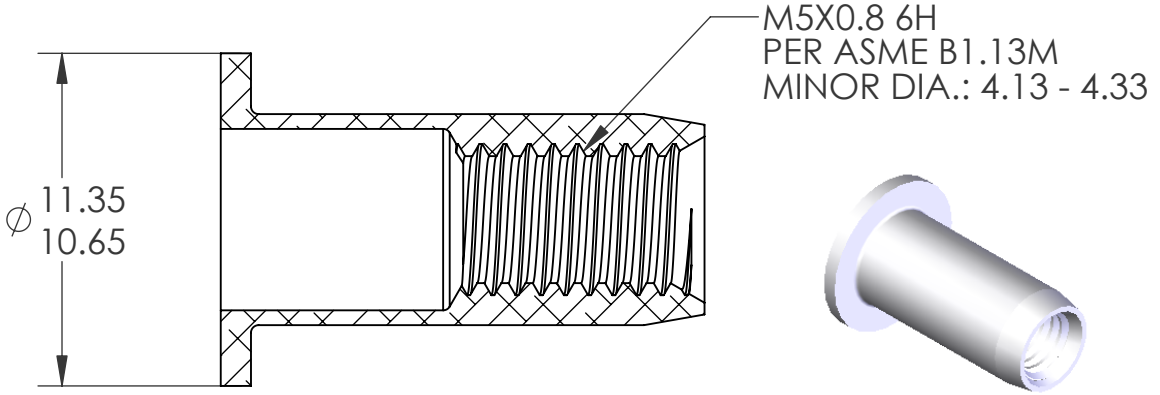

SECTION A-A

NOTE:
1. GRIP RANGE: 3.0 - 5.5
2. HOLE SIZE: 7.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: MS 50 SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILIMETERS
TOLERANCES:
ANGULAR: MACH ± 1 BEND ±1
ONE PLACE DECIMAL ±0.10
TWO PLACE DECIMAL ±0.05

INTERPRET GEOMETRIC TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL
ALUMINUM
ALMG 2.5 DIN 3.3523

FINISH
NONE

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	JVK	3/5/08
CHECKED		
ENG APPR.	JVK	3/5/08
MFG APPR.	TB	8/7/08
Q.A.		

COMMENTS:

E-mail: info@sherex.com
www.sherex.com
Phone: 866-474-3739
Fax: 716-875-0358

TITLE:
FLAT HEAD OPEN END

SIZE	DWG. NO.	REV
A	TU-AM5UPO55	A

SCALE: 2:1 | WEIGHT:.0008 kg | SHEET 1 OF 1

5 4 3 2 1