


REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE		N/A
B	UPDATED LENGTH	5/17/12	1529
C	UPDATED HEAD A/F DIM.	12/2/15	2066

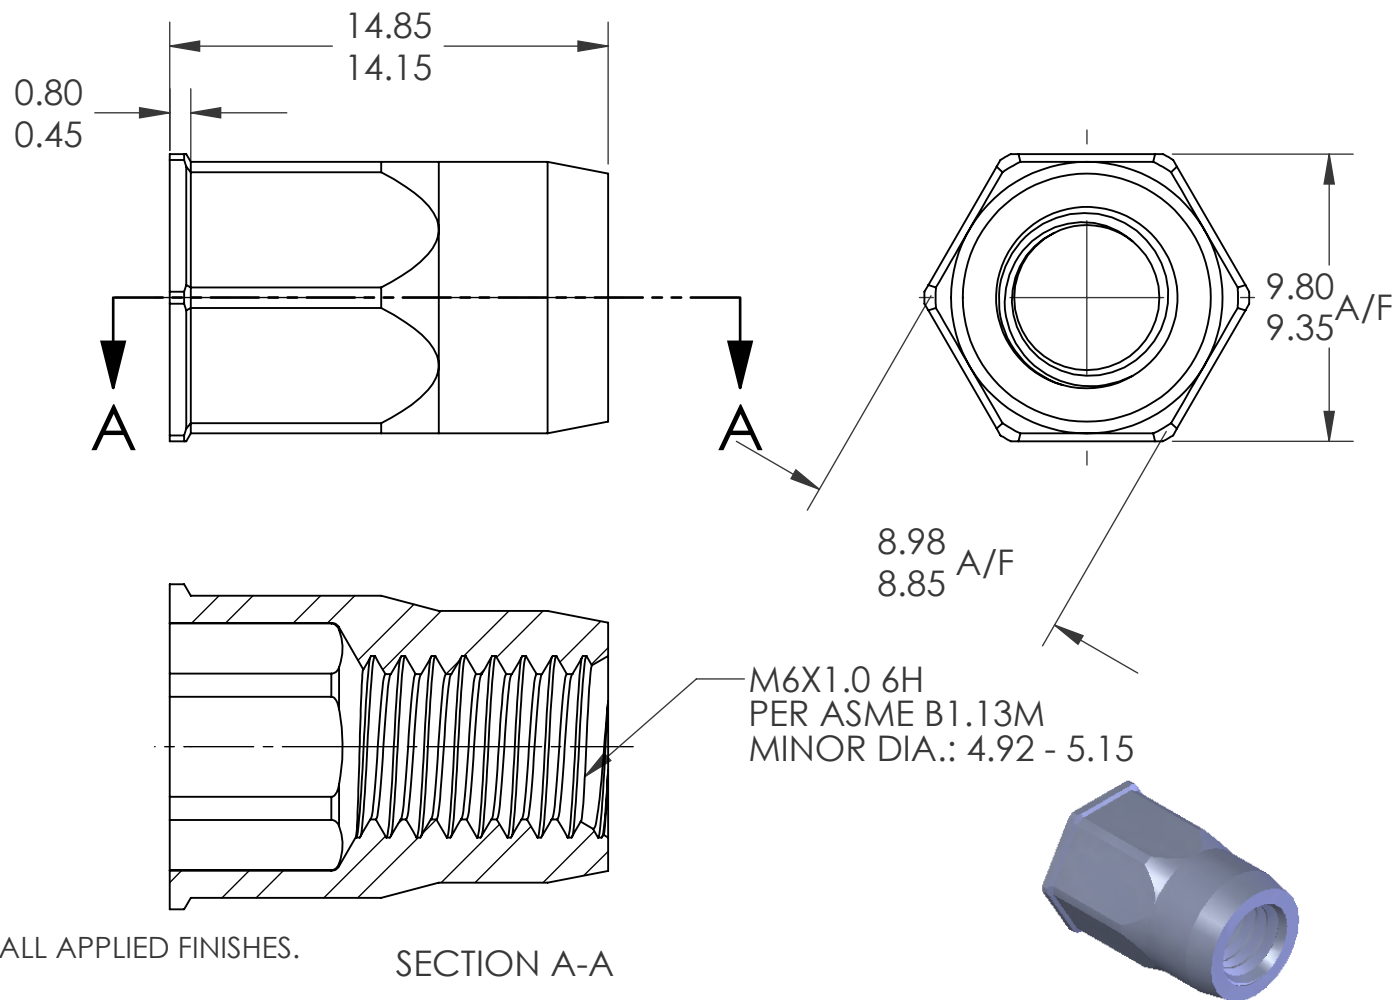

NOTE:

- GRIP RANGE: 0.5 - 3.0
- HOLE SIZE: 9.0 +0.1/0.0 A/F AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: N/A
- LUBRICATION: NONE
- INSTALLATION TOOL: FLEX 5P/5S SPIN-PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN METRIC TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL $\pm .5$ TWO PLACE DECIMAL $\pm .25$	DRAWN	TOO	6/14/07				
			CHECKED			TITLE: LOW PROFILE HEAD FULL HEX			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	TOO	6/14/07				
			MFG APPR.	GW	6/14/07				
		MATERIAL	Q.A.						
		STAINLESS 304 Cu	COMMENTS:						
			E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-681-0270			SIZE DWG. NO.		REV	
		FINISH				A		TU-SSM6HUKO30	C
NEXT ASSY	USED ON	PASSIVATE				SCALE: 2:1		WEIGHT: .0045 kg	SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING							