

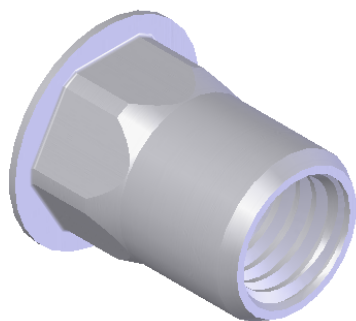
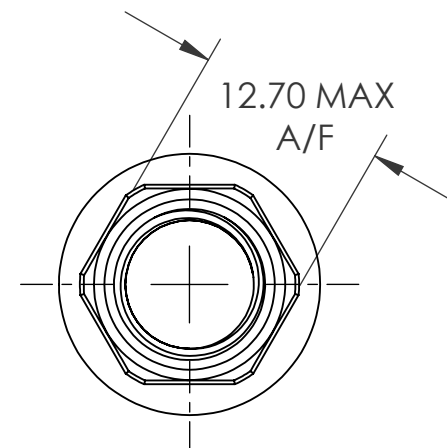


REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	5/7/09	1174

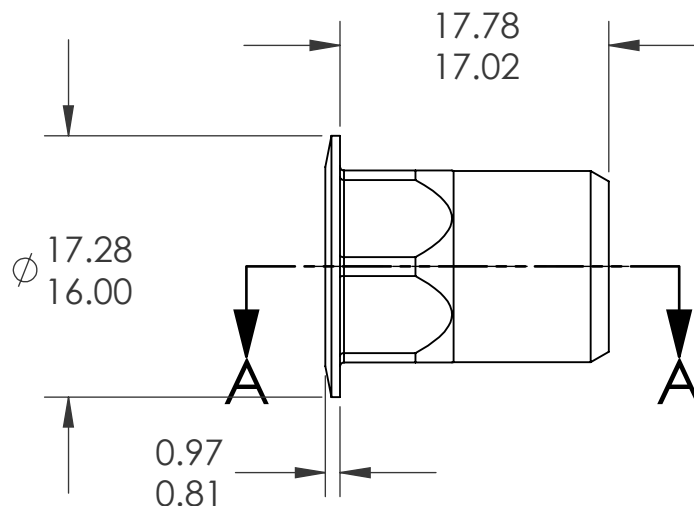

M10X1.5 6H
PER ASME B1.13M
MINOR DIA.: 8.38 - 8.68

SECTION A-A

NOTE:

- GRIP RANGE: 0.7 - 3.8
- HOLE SIZE: 12.70 +0.1/-0.0 A/F AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 13.46 MAX.
- LUBRICATION: WAX
- INSTALLATION TOOL: SSG 803 SPIN-SPIN

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
		DIMENSIONS ARE IN METRIC TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±.5 TWO PLACE DECIMAL ±.25	DRAWN	TWR	5/7/09			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED			TITLE: LARGE FLANGE SEMI-HEX OPEN END		
		MATERIAL	ENG APPR.	JVK	5/7/09			
		5056 ALUMINUM	MFG APPR.					
		FINISH	Q.A.	JVK	5/7/09			
NEXT ASSY	USED ON	NONE	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			SIZE	DWG. NO.	REV
APPLICATION		DO NOT SCALE DRAWING				A	CAH3-1015-3.8	A
						SCALE: 2:1 WEIGHT: kg		SHEET 1 OF 1