
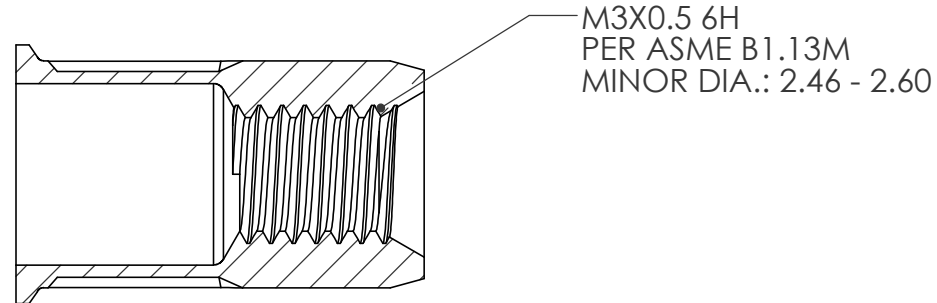
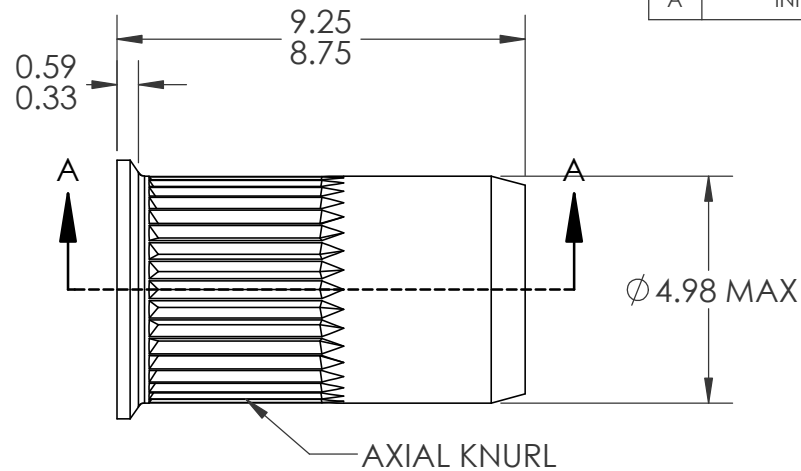


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	06/02/26	4759	JH

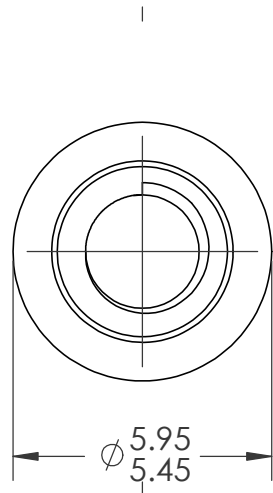

SECTION A-A

NOTE:

- GRIP RANGE: 0.5-2.0
- HOLE SIZE: 5 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 6.0 REF
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JH	1/13/26			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED					
		MATERIAL	ENG APPR.					
		1010 STEEL	MFG APPR.					
		FINISH	Q.A.			TITLE: SMALL FLANGE KNURLED BODY		
		ZINC WITH CLEAR TRIVELANT CHROMATE PER SFS-01-001, SC4	COMMENTS:					
			E-mail: info@sherex.com					
			www.sherex.com					
			Phone: 866-474-3739					
			Fax: 716-875-0358					
NEXT ASSY	USED ON					SIZE DWG. NO.	REV	
						A	CKKM2-350-2.0	
							A	
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1	WEIGHT:	SHEET 1 OF 1