

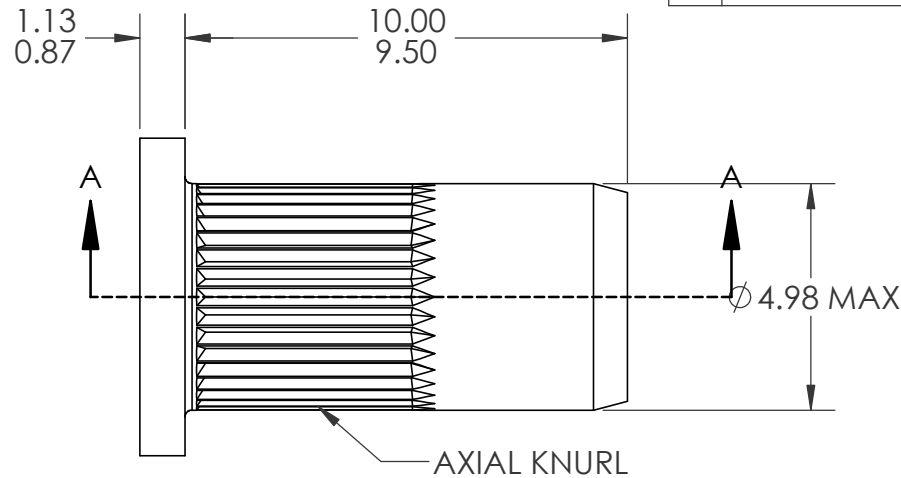


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	06/02/26	4759	JH

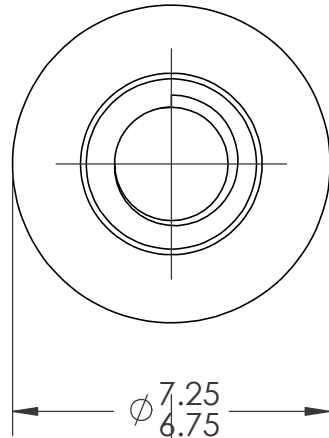

AXIAL KNURL

M3X0.5 6H
PER ASME B1.13M
MINOR DIA.: 2.46 - 2.60

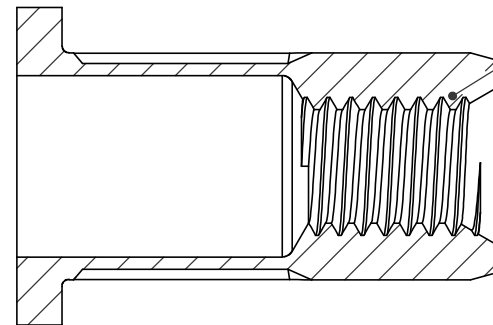

SECTION A-A

NOTE:

- GRIP RANGE: 0.5-2.0
- HOLE SIZE: 5 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 6.0 REF
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.08	DRAWN	JH	1/13/26	
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED			
		MATERIAL	ENG APPR.			
		1010 STEEL	MFG APPR.			
		FINISH	Q.A.			TITLE: LARGE FLANGE KNURLED BODY
		ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			
NEXT ASSY	USED ON					
APPLICATION		DO NOT SCALE DRAWING	SIZE DWG. NO.			REV
			A CKLM2-350-2.0			A
			SCALE: 2:1 WEIGHT:		SHEET 1 OF 1	