
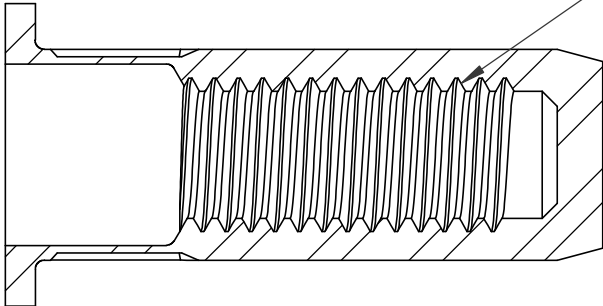
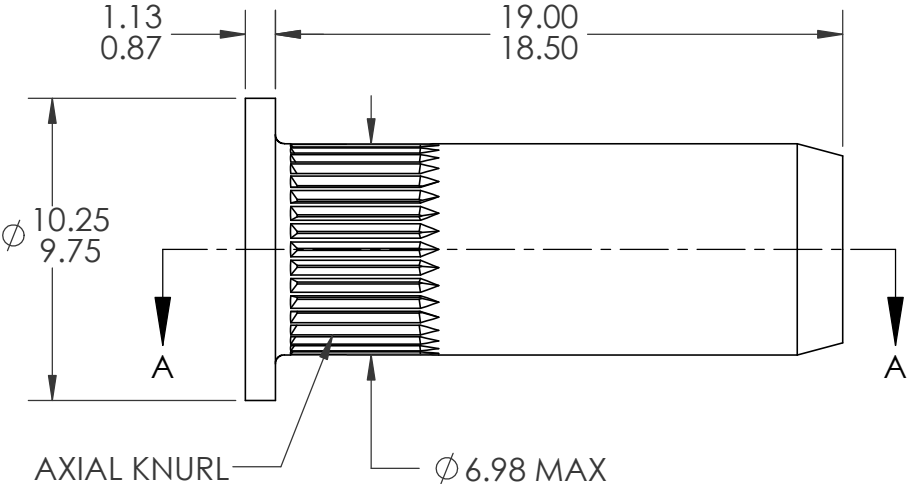
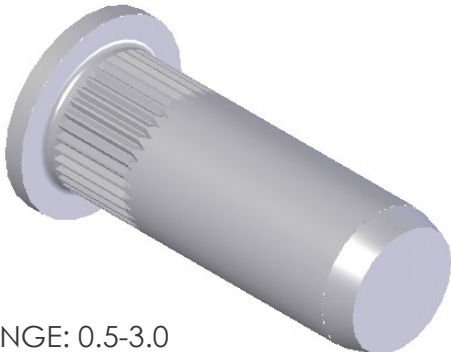


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	04/01/26	4792	JH

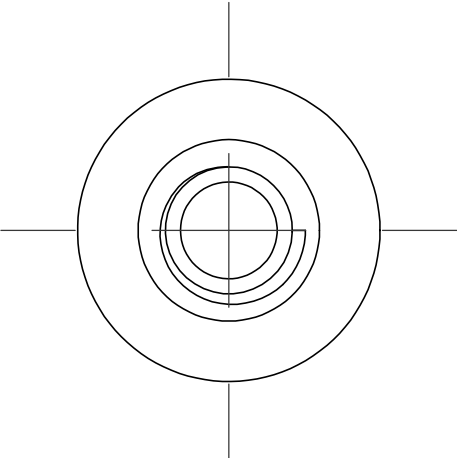

M5X0.8 6H
PER ASME B1.13M
MINOR DIA.: 4.14 - 4.33

SECTION A-A
SCALE 4 : 1

- NOTE:
- GRIP RANGE: 0.5-3.0
 - HOLE SIZE: 7.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 14.3 REF.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE			
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JH	04/01/26	TITLE: LARGE FLANGE KNURLED BODY		
			CHECKED					
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.					
			MFG APPR.					
		MATERIAL 1010 STEEL	Q.A.					
		FINISH ZINC WITH CLEAR TRIVALENT CHROMATE PER SFS-01-001, SC4	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			SIZE A	DWG. NO. CKLM2-580-3.0B	REV A
NEXT ASSY	USED ON							
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1	WEIGHT: kg	SHEET 1 OF 1