


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIALS
A	INITIAL RELEASE	9/15/2025	4673	JLC

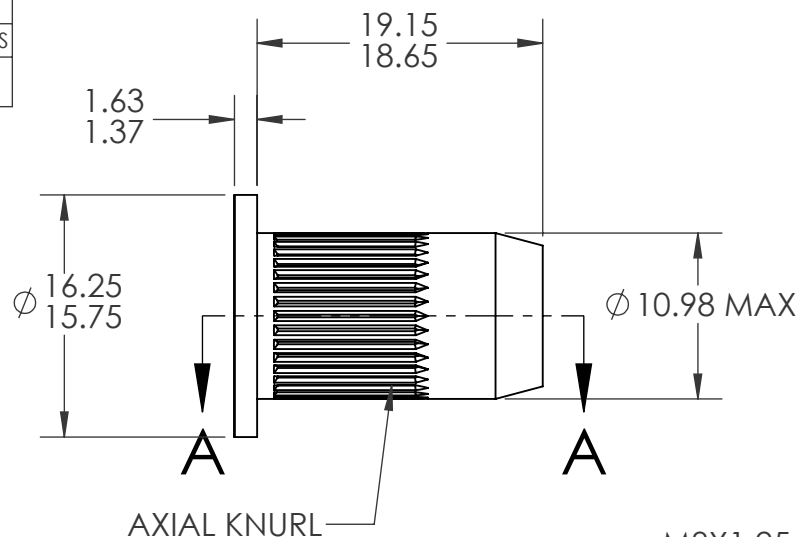

M8X1.25 6H
PER ASME B1.13M
MINOR DIA.: 6.65 - 6.91

SECTION A-A

NOTE:


- GRIP RANGE: 3.0 - 5.5
- HOLE SIZE: 11.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: 11.0 REF.
- LUBRICATION: NONE
- INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES:		NAME	DATE
		ANGULAR: MACH±1 BEND ±1 TWO PLACE DECIMAL ±.10 THREE PLACE DECIMAL ±.05	DRAWN	JLC	6/10/25
			CHECKED		
			ENG APPR.	JVK	6/10/25
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	MFG APPR.		
			Q.A.		
		MATERIAL C1010	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358		
NEXT ASSY	USED ON	FINISH ZINC PLATING W/CLEAR TRIVALENT CHROMATE PER SHEREX SFS-01-001, SC4			
APPLICATION		DO NOT SCALE DRAWING			



TITLE:

LARGE FLANGE KNURLED BODY

SIZE
A

DWG. NO.
CKLM2-8125-5.5

REV
A

SCALE: 2:1

WEIGHT:

SHEET 1 OF 1