
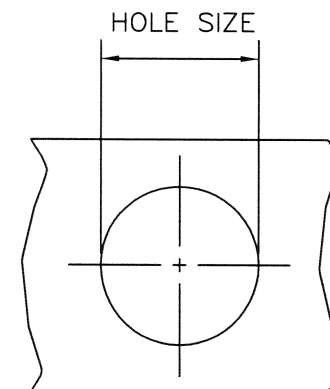
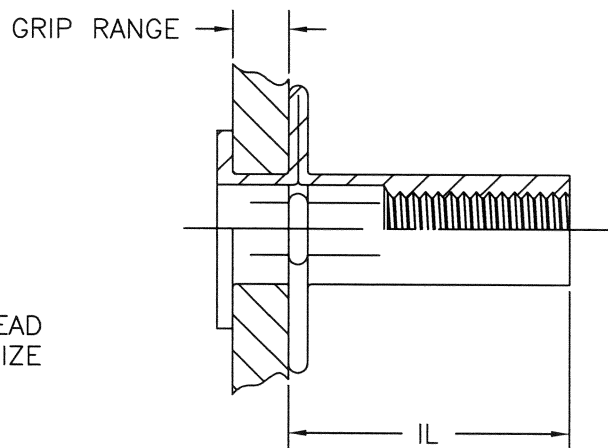


Metric Thread (Unit – Millimeters)

Part Number (steel)	Thread Size	Grip Range Min. Max.	L ± 0.38	HD ± 0.43	HT ± 0.13	D Max.	IL Ref.	HOLE SIZE $+0.15/-0.00$
CPB2-8125-7.1	M8X1.25 6H	0.50 7.10	28.95	19.23	1.57	12.70	14.48	12.75

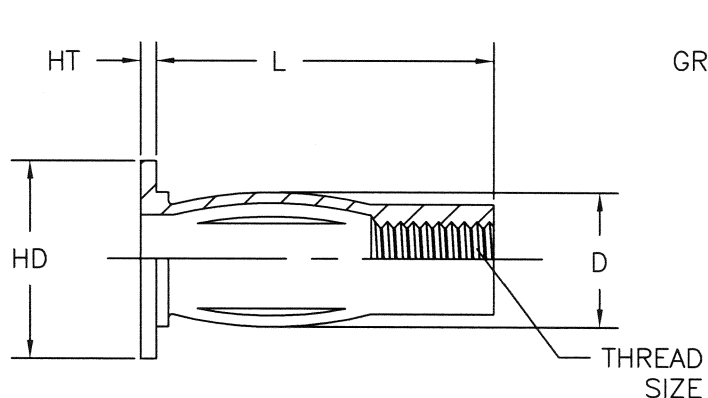

CPB Specifications

Material: Steel 1008/1010

Finish: Zinc Plated–Yellow Dichromate
per ASTM B633 Fe/Zn 8, Type II

Part Number Description

CPB2-8125-7.1

CPB
Product Style
Slotted Body
Pre-bulbed

2
Material
2–Steel

8125
Thread Size

7.1
Grip Range

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX FASTENING SOLUTIONS. AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

NOTE: SHEREX RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

SHEREX FASTENING SOLUTIONS

1400 COMMERCE PKWY.
LANCASTER, NY 14086 USA



SHEREX FASTENING SOLUTIONS

DRAWN BY:

TOO

DATE:

5/23/05

SCALE:

1:1

TITLE:

CPB STYLE RIVET NUT

CHECK'D BY:

TOO

DATE:

5/23/05

E-mail: info@sherex.com
www.sherex.com

Phone: 866-474-3739
Fax: 716-681-0270

DRAWING NO.

CPB2-8125-7.1

REV	DESCRIPTION	ECN	DATE

APPR'D BY:

AJP

DATE:

5/23/05