

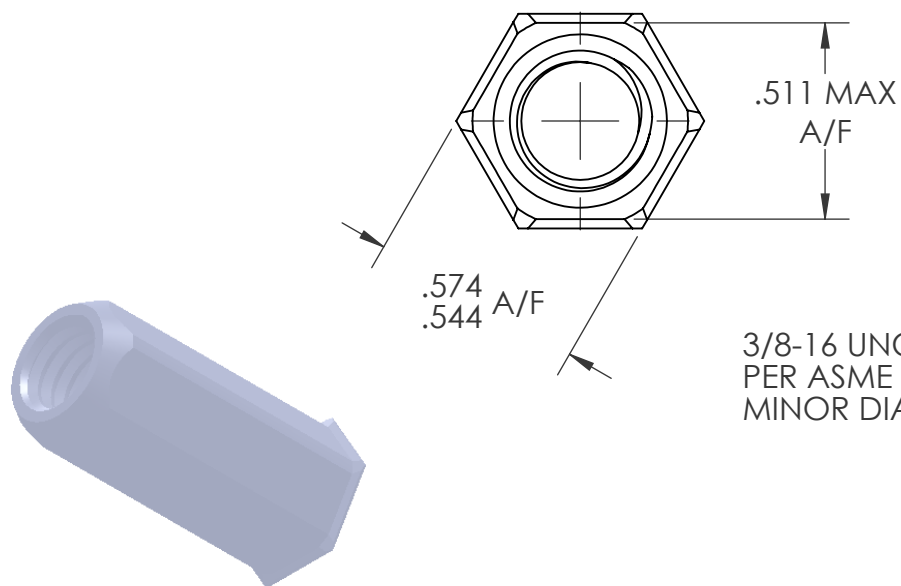


REVISIONS			
REV.	DESCRIPTION	DATE	ECN
A	INITIAL RELEASE	10/16/14	1705

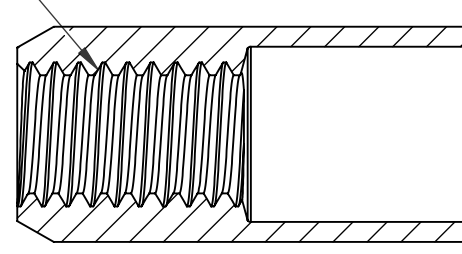

3/8-16 UNC 2B
PER ASME B1.1
MINOR DIA.: .307 - .321

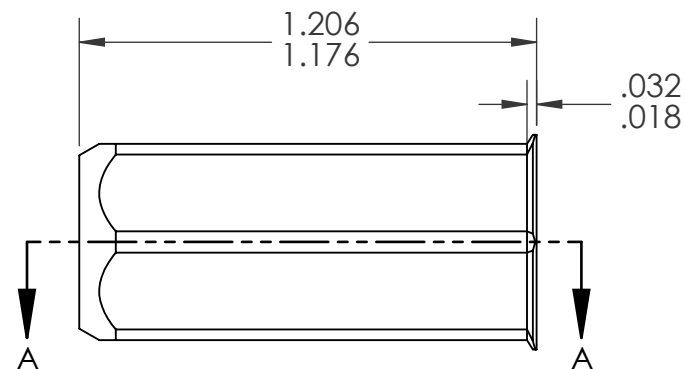


SECTION A-A

NOTE:

1. GRIP RANGE: .295 - .413
2. HOLE SIZE: .512 +.004/-.000 A/F AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: .689 REF.
4. LUBRICATION: NONE
5. INSTALLATION TOOL: FLEX 5P/5S SPIN PULL
6. THREAD PROOF LOAD MEETS GRADE 5 PER SAE J995: 10,300LBF

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX, AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE					
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± .1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005	DRAWN	CL	10/16/14					
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED			TITLE: SMALL FLANGE HEX BODY				
			ENG APPR.	JVK	10/16/14					
			MFG APPR.							
			Q.A.	JR	10/16/14					
		MATERIAL C1008/C1010	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			SIZE		DWG. NO.	REV	
		FINISH ZINC PLATE CLEAR TRIVALENT CHROMATE PER SHEREX SFS-01-001				A		FHK2-3716-413		A
NEXT ASSY	USED ON									
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT: kg	SHEET 1 OF 1	