
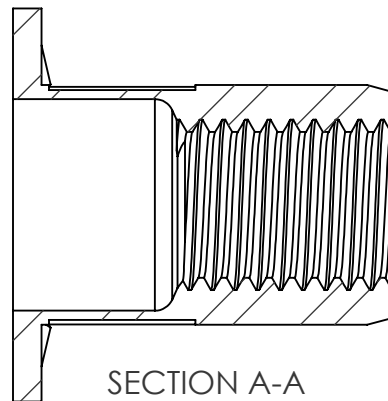
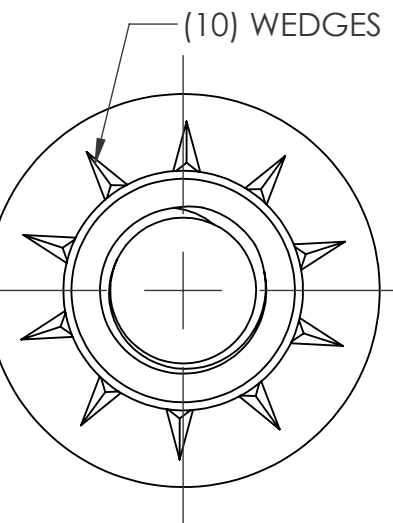
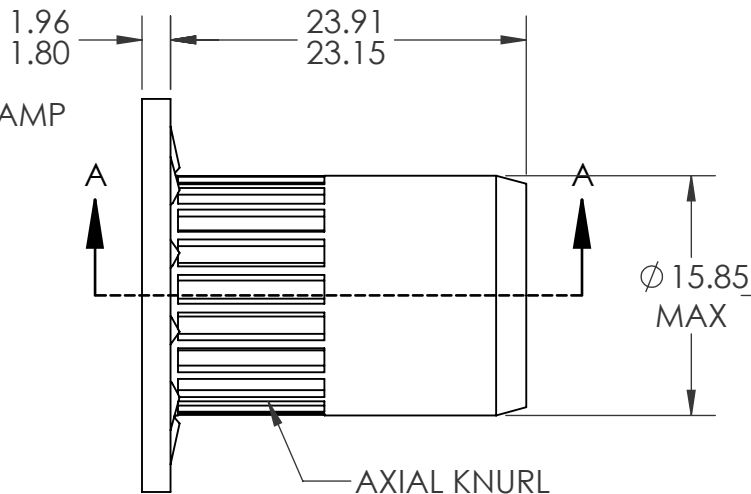


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	10/11/2024	4547	ARG

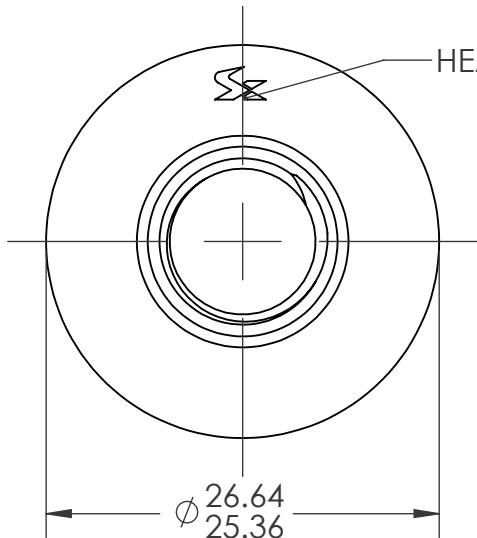

- NOTE:
- GRIP RANGE: 1.5 - 3.5
 - HOLE SIZE: 15.87 +0.15/-0.00 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 18.5 MAX.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN-PULL
 - THREADS MEET CLASS 8 PROOF LOAD: 50.5kN PER ISO 898-2.

CUSTOMER APPROVAL:

DATE:

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
ANGULAR: MACH ± 1 BEND ± 1
ONE PLACE DECIMAL ± 0.3
TWO PLACE DECIMAL ± 0.08

INTERPRET GEOMETRIC
TOLERANCING PER:
ASME Y14.5M-1994

MATERIAL

C1008/C1010 STEEL

FINISH

ZINC PLATE CLEAR TRIVALENT
CHROMATE PER SFS-01-001 SC1

DO NOT SCALE DRAWING

NAME

ARG

DATE

10/11/24

DRAWN

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:

E-mail: info@sherex.com

www.sherex.com

Phone: 866-474-3739

Fax: 716-875-0358



TITLE:

M10 OPEN END LARGE FLANGE
OPTISERT

SIZE DWG. NO.

A OPT2-1015-3.5

REV

A

SCALE: 2:1 WEIGHT: 0.0172kg

SHEET 1 OF 1