
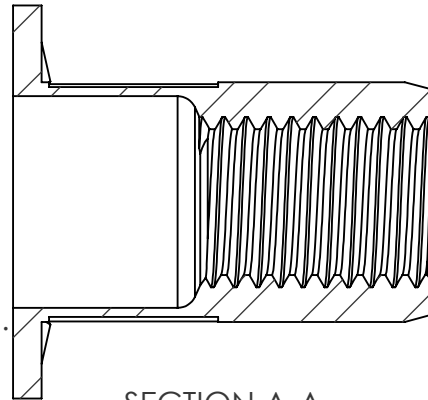
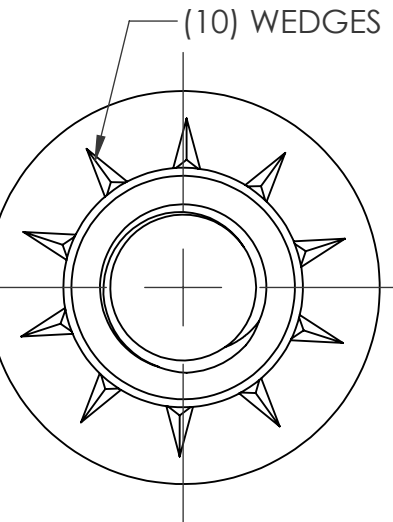
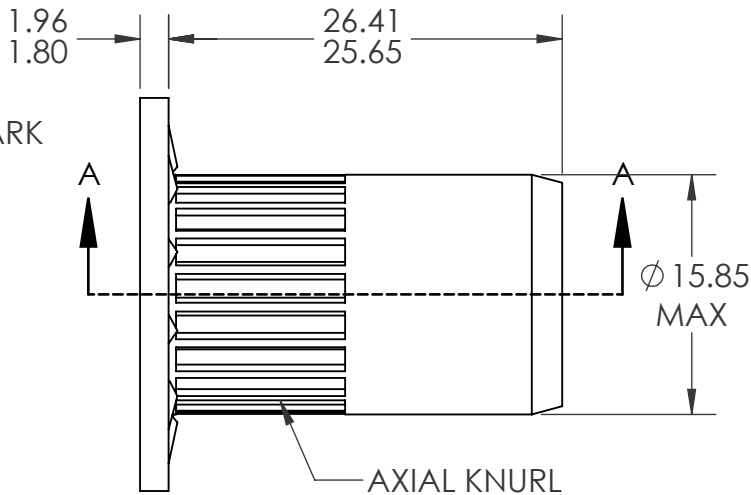
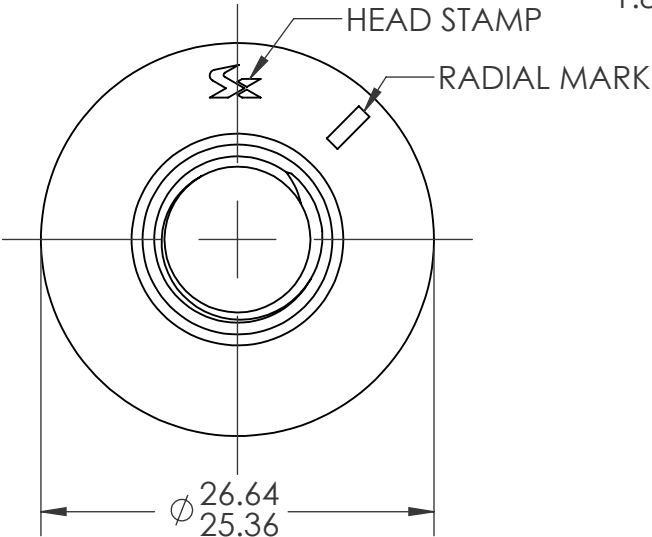


REVISIONS				
REV.	DESCRIPTION	DATE	ECN	INITIAL
A	INITIAL RELEASE	10/11/2024	4547	ARG



M10X1.5 6H
PER ASME B1.13M
MINOR DIA.: 8.38 - 8.38

- NOTE:
- GRIP RANGE: 3.5 - 6.0
 - HOLE SIZE: 15.87 +0.15/-0.00 AFTER ALL APPLIED FINISHES.
 - INSTALLED LENGTH: 18.5 MAX.
 - LUBRICATION: NONE
 - INSTALLATION TOOL: SPIN-PULL
 - THREADS MEET CLASS 8 PROOF LOAD: 50.5kN PER ISO 898-2.

CUSTOMER APPROVAL:				UNLESS OTHERWISE SPECIFIED:		NAME		DATE					
DATE:				DIMENSIONS ARE IN MILLIMETERS		DRAWN		10/11/24					
				TOLERANCES:		CHECKED							
				ANGULAR: MACH ± 1 BEND ± 1		ENG APPR.		JVK					
				ONE PLACE DECIMAL ± 0.3		MFG APPR.				TITLE: M10 OPEN END LARGE FLANGE OPTISERT			
				TWO PLACE DECIMAL ± 0.08		Q.A.							
				INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994		COMMENTS:							
PROPRIETARY AND CONFIDENTIAL THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY. SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE. UNLESS OTHERWISE SPECIFIED, ALL SPECIFICATIONS REFERENCED ON THIS DRAWING WILL PERTAIN TO THE MOST RECENT AND ACTIVE REVISION.				MATERIAL		E-mail: info@sherex.com		SIZE		DWG. NO.		REV	
				C1008/C1010 STEEL		www.sherex.com		A		OPT2-1015-6.0		A	
				FINISH		Phone: 866-474-3739							
				ZINC PLATE CLEAR TRIVALENT CHROMATE PER SFS-01-001 SC1		Fax: 716-875-0358							
		NEXT ASSY		USED ON		DO NOT SCALE DRAWING		SCALE: 2:1		WEIGHT:		SHEET 1 OF 1	